


JPA Series

2.0-6.5GHz 10W RF Power Amplifier

Features

- Frequency Range: 2.0-6.5GHz
- Small Signal Gain: 43dB
- P_{SAT} : +40dBm (10W)
- DC Power: +32V @ 1100mA
- DC Power Reverse Protected
- RF Connector: SMA Female
- GaN RF Power Amplifier
- Class AB Power Amplifier

Picture

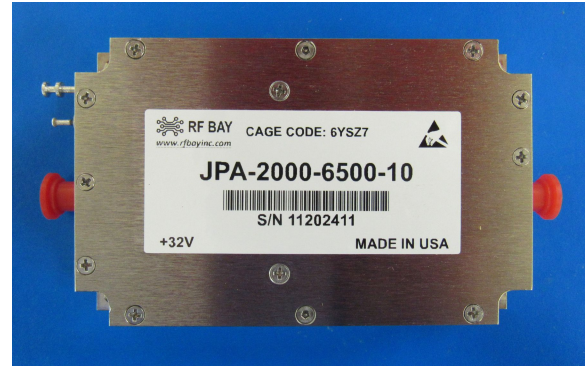


Electrical Specifications @+25°C, $Z_{in}=Z_{out}=50\ \Omega$, $V_{supply} = +32VDC$

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	GHz	2.0		6.5
Small Signal Gain (S_{21}) ($P_{IN} = -45dBm$)	$f = 2.0GHz$	41	43	
	$f = 4.25GHz$	42	44	
	$f = 6.5GHz$	41	43	
Gain Flatness	dB		± 1.5	± 2.5
Output Power P_{3dB}	$f = 2.0GHz$		+37.5	
	$f = 4.25GHz$	+38.0	+39.0	
	$f = 6.5GHz$		+38.5	
Output Power P_{SAT}	$f = 2.0GHz$		+39.0	
	$f = 4.25GHz$	+40.0	+41.0	
	$f = 6.5GHz$		+40.0	
Output IP3	$f = 4.25GHz$		+47	
Efficiency $P_{IN} = +5dBm, f = 4.25GHz$	%		20	
Noise Figure	dB		4.0	5.0
Reverse Isolation (S_{12})	dB	-40	-45	
VSWR-Input (S_{11})	ratio:1		1.5:1	2.0:1
DC Supply Voltage	V	28	32	33
DC Supply Current	No RF Input	mA	1400	1600
	$P_{OUT} = +40dBm$	mA	2100	2500


JPA Series

2.0-6.5GHz 10W RF Power Amplifier

Gain S21, Isolation S12, Return Loss S11, S22 vs Frequency

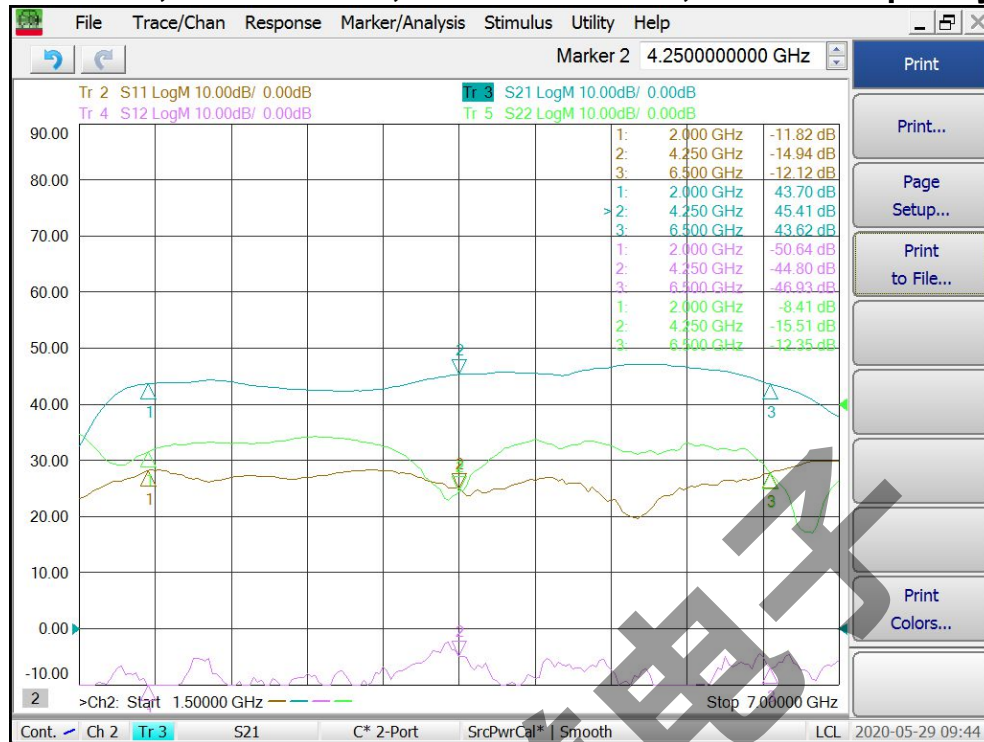


Noise Figure vs Frequency

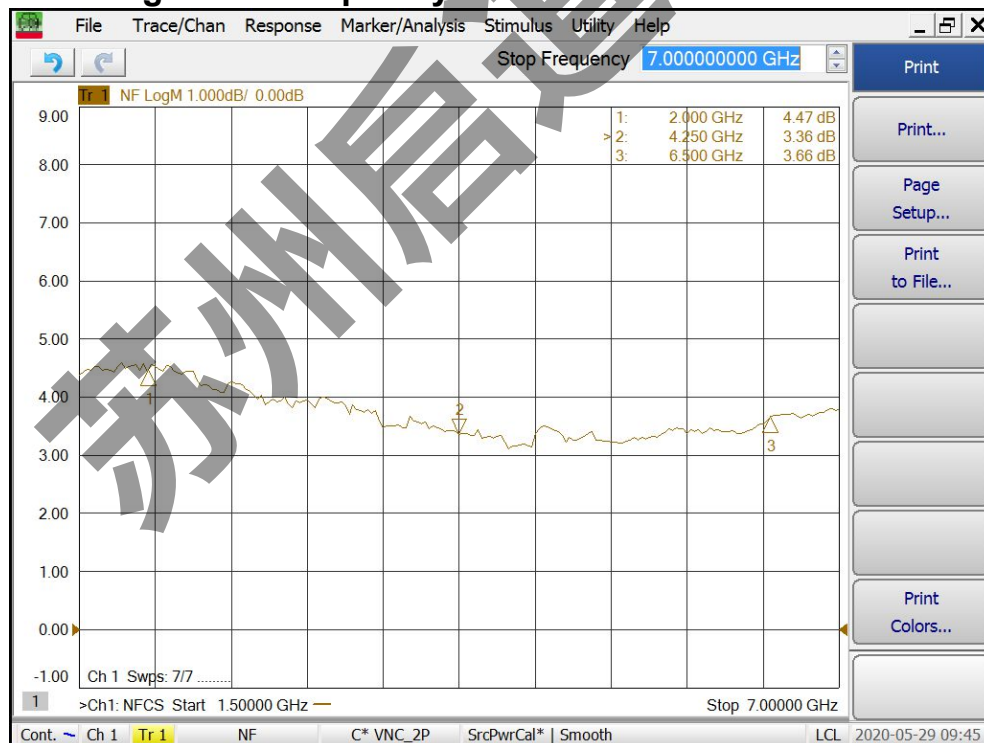


JPA Series

2.0-6.5GHz 10W RF Power Amplifier

Output Pout vs Frequency

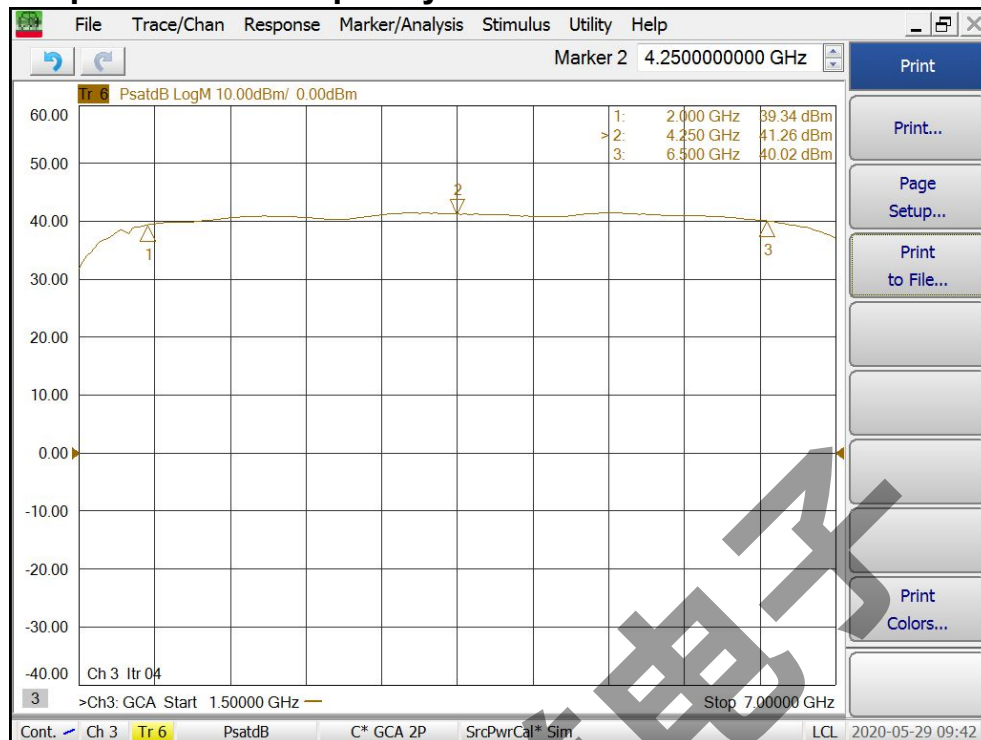







Output IP3 vs Frequency

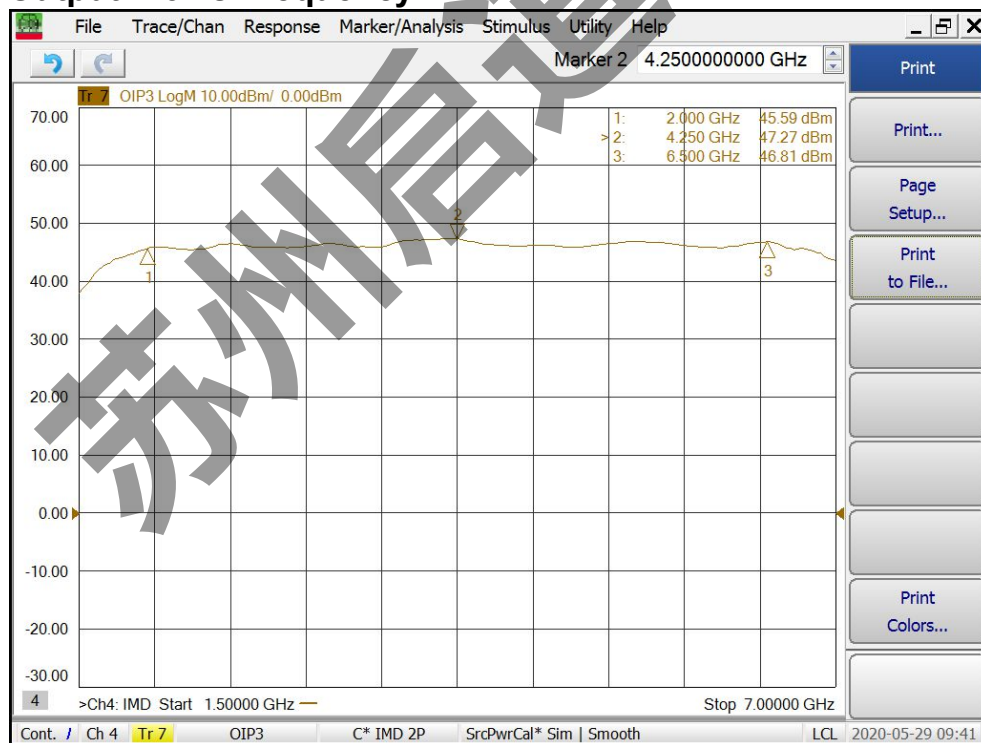

JPA Series

2.0-6.5GHz 10W RF Power Amplifier







Typical Performance @ +25°C

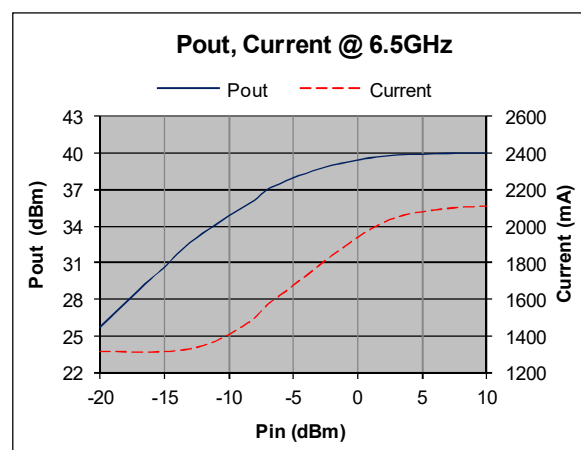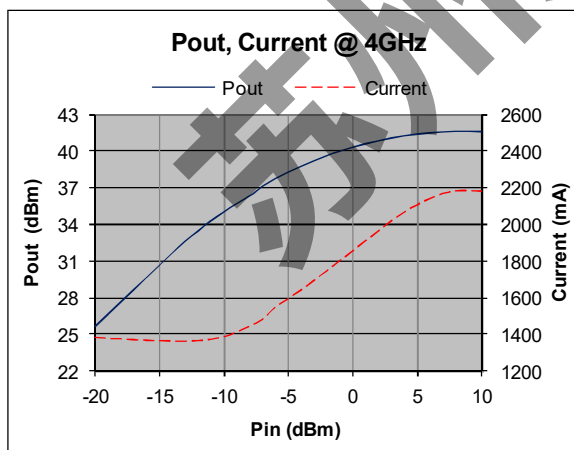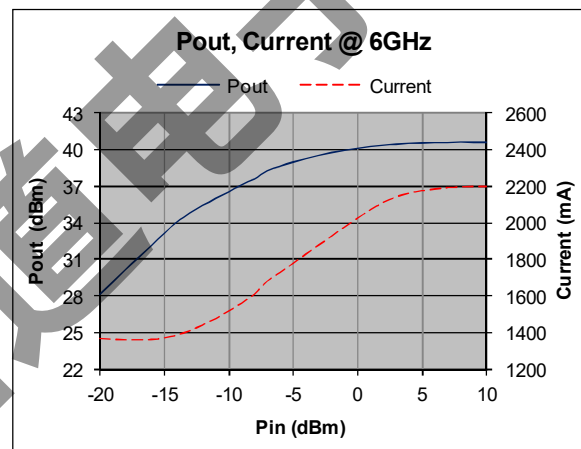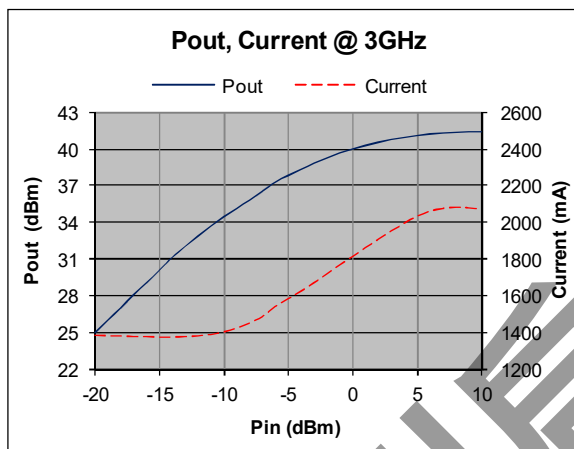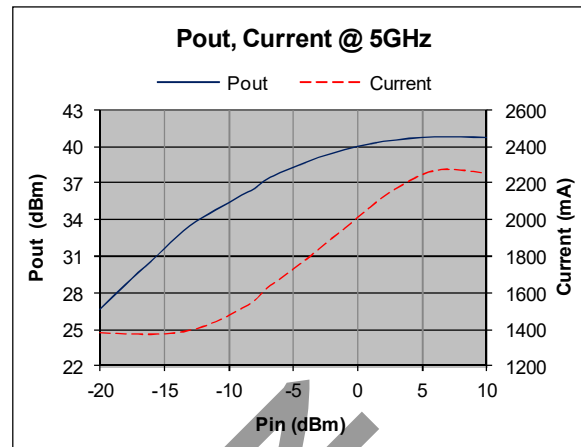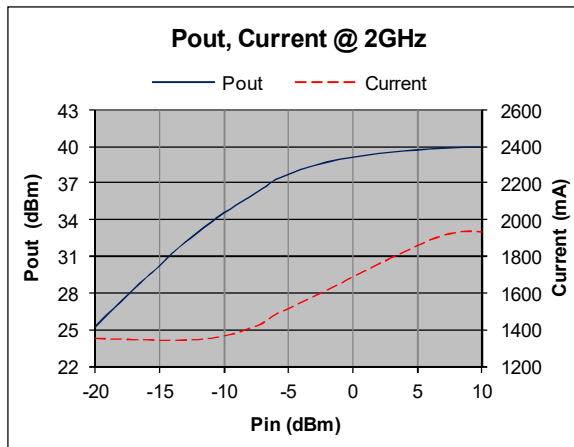

JPA Series

2.0-6.5GHz 10W RF Power Amplifier







Typical Performance @ +25°C

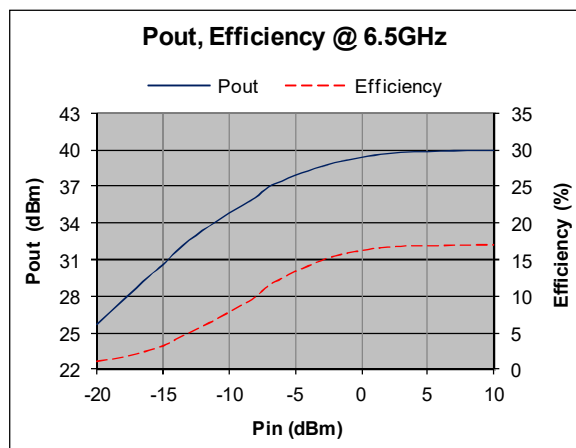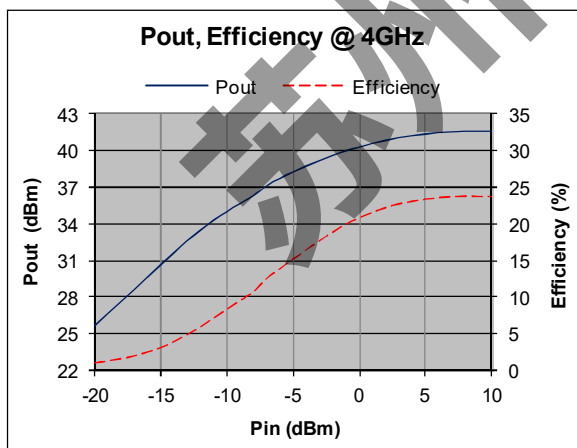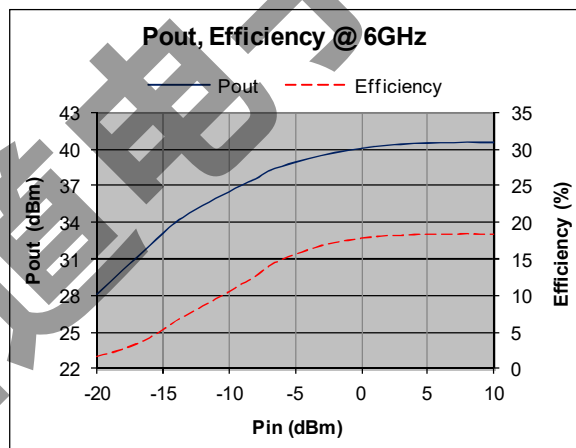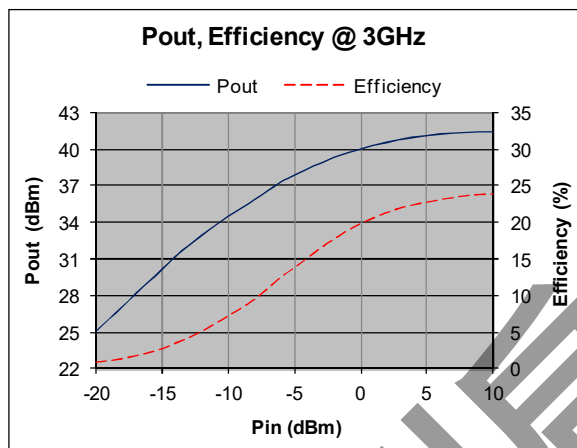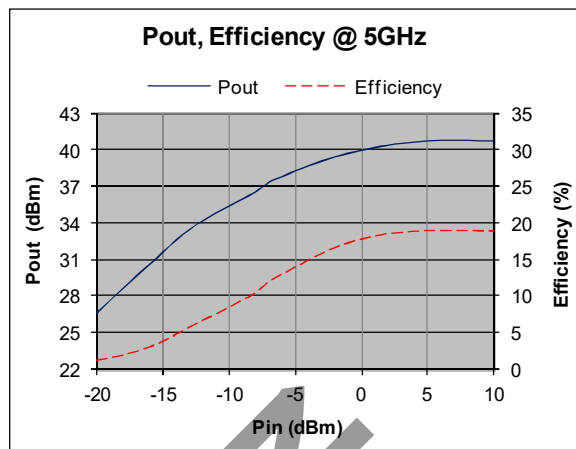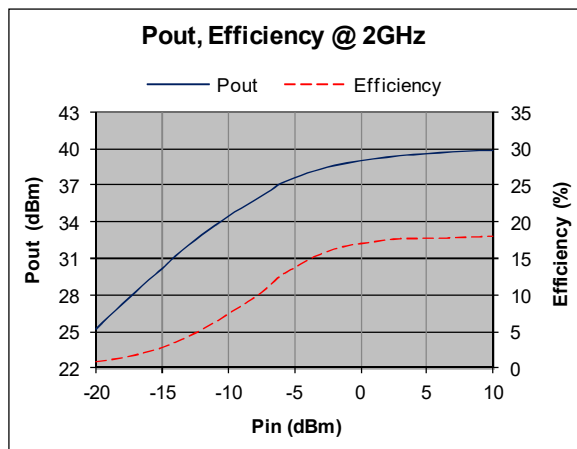

JPA Series

2.0-6.5GHz 10W RF Power Amplifier

Typical Performance @ +25°C

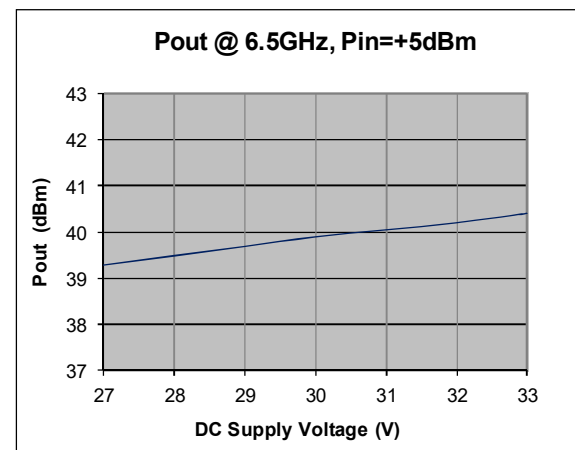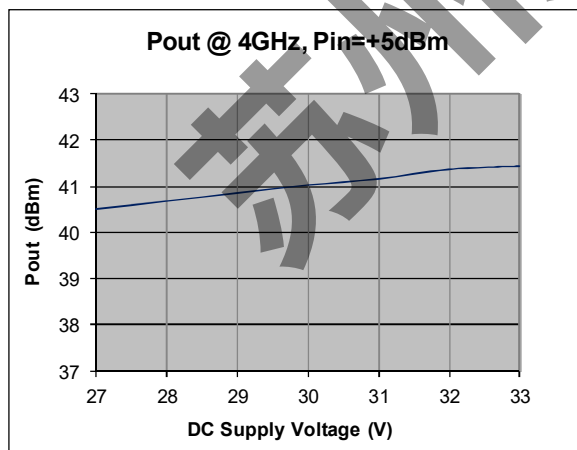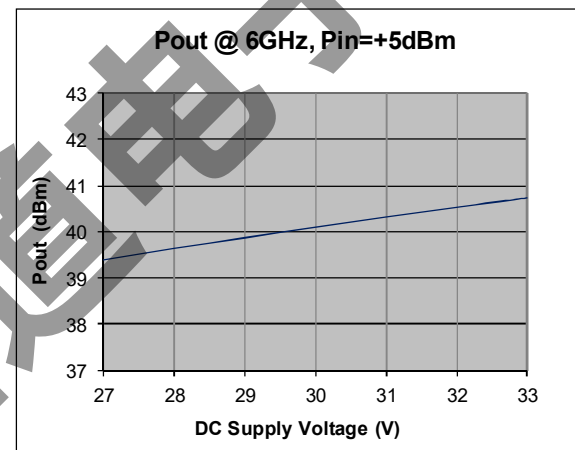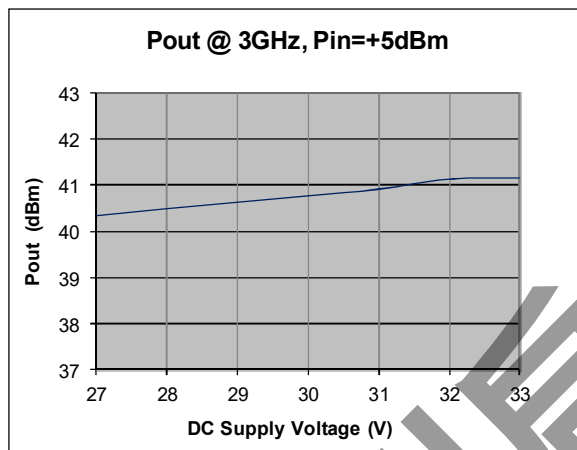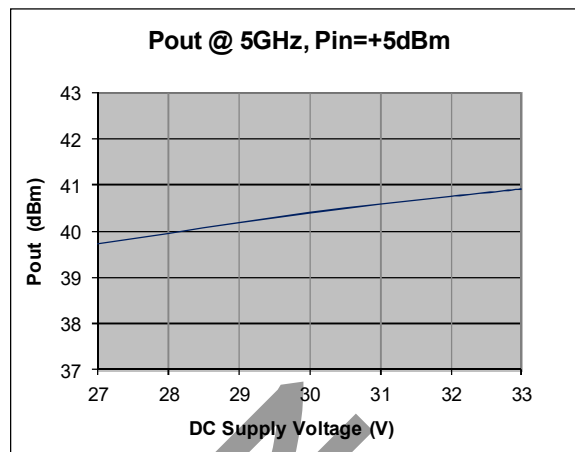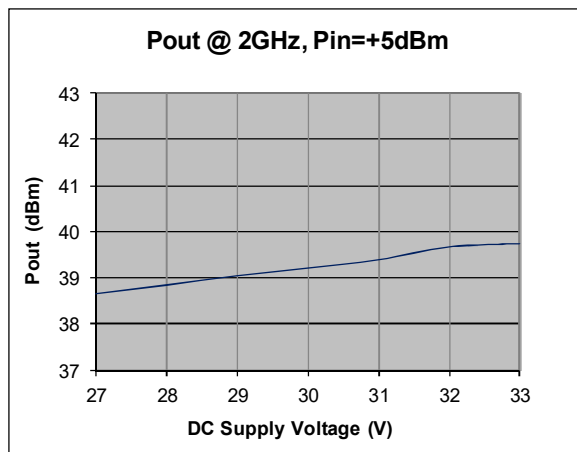

JPA Series**2.0-6.5GHz 10W RF Power Amplifier****Absolute Maximum Ratings**

Parameter	Absolute Maximum
Supply Voltage	+33V
RF Input Power	+15dBm
Operating Temperature	-20 °C to +65 °C
Storage Temperature	-40 °C to +100 °C


ESD Sensitive Material**Warning and Caution:**

- 1) Adequate heatsink must be used. Cooling Fan highly recommended. Amplifier operational baseplate temperature must be within datasheet operating temperature range.
- 2) Load must be connected to amplifier output at all time if DC power is ON.
- 3) If power amplifier connected to an antenna for signal transmission, it is strongly recommended to use a high power isolator or fixed attenuator between amplifier output and antenna input.

JPA Series

2.0-6.5GHz 10W RF Power Amplifier

Outline

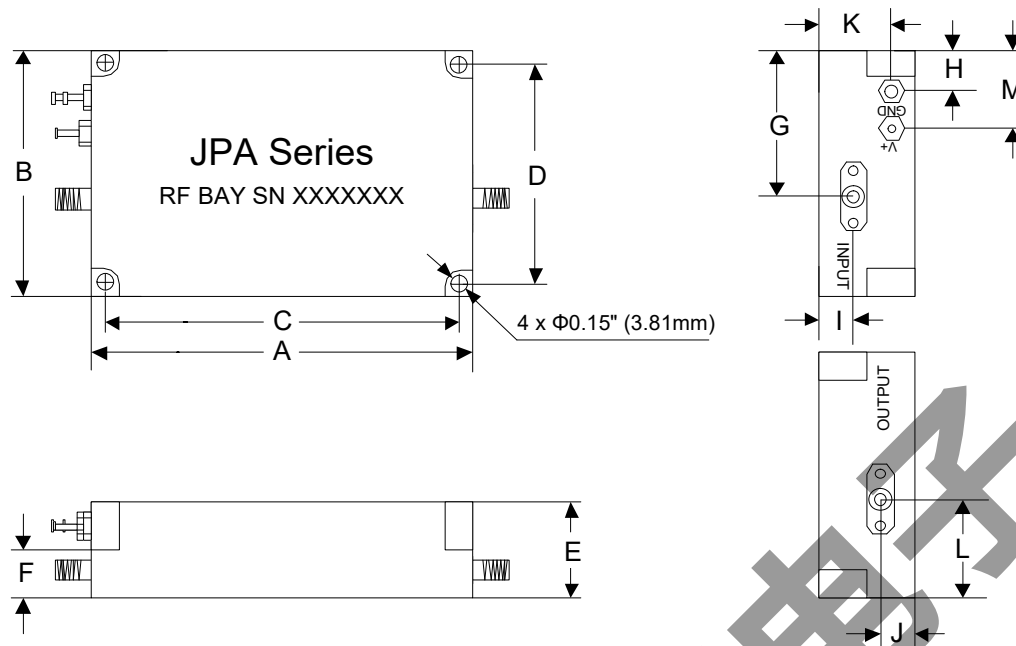

Mounting screws recommended to use hex socket head cap #6x3/4"

	A	B	C	D	E	F	G	H	I
Inch	4.00	2.50	3.70	2.20	1.05	0.54	1.40	0.30	0.30
mm	101.60	63.50	93.98	55.88	26.67	13.72	35.56	7.62	7.62
	J	K	L	M					
Inch	0.30	0.75	1.10	0.70					
mm	7.62	19.05	27.94	17.78					