

**CMP-2G18G-4030-S** is a wideband medium power amplifier providing up to 30 dBm and a gain of 40 dB. The compact size and modularity makes it ideal for a wide range of applications.

#### Features:

- Frequency Range: 2 to 18 GHz
- P1dB: 30 dBm Min
- Flat Small Signal Gain: 40 dB Min
- Small size, low cost
- Unconditionally Stable


#### Specifications:

Frequency:	2.0 - 18.0 GHz
Gain:	40 dB Min
Gain Flatness:	$\pm 2$ dB Max
Noise Figure:	7.0 dB Max
Output P1dB:	30 dBm Min
VSWR Input:	2.2:1 Max
VSWR Output:	2.2:1 Max
DC Voltage:	+15 VDC
DC Supply Current:	1800 mA Typ
RF Connectors:	SMA Female


#### Environmental Ratings:

Temperature:	0°C to +55 °C Operating -25 °C to +75 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

#### Mechanical Outline(Inches) :

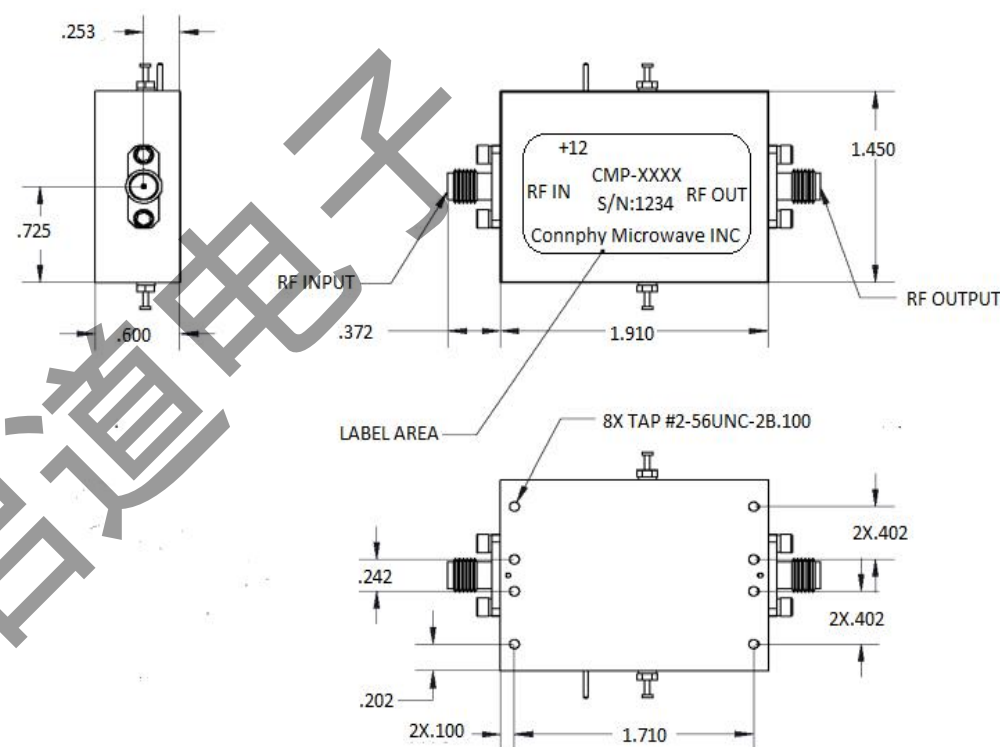

#### Medium Power Amplifier CMP-2G18G-4030-S

DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@qiidao.com">sales@qiidao.com</a>
CHECKRD:	DATE: 09/12/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.