


## FPS Series

## 0.3 – 4.0GHz Divide-By-96 Prescaler

### Features

- Input Frequency: 0.3-4.0GHz
- Output Frequency: 3.125-41.67MHz
- Divide Ratio: 96
- Output Power: -1dBm
- Phase Noise: -144dBc/Hz
- DC Power: 12V
- SMA Connector

### Picture

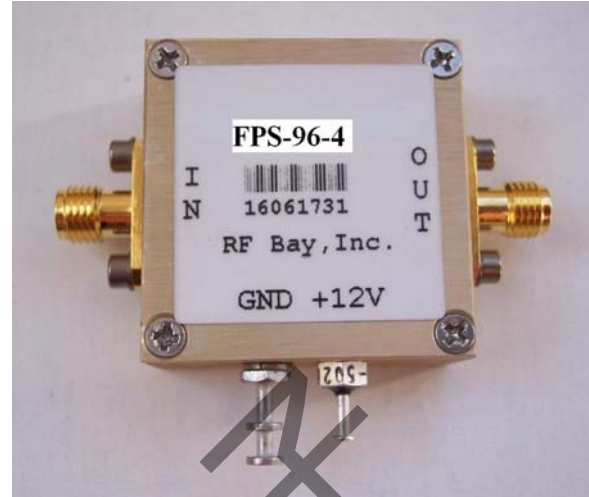

### Description


FPS-96-4 is a wideband frequency divider with divide ratio of 96. The AC coupled square wave output with 1.2 Vp-p swing fits many PLL applications.

### Electrical Specifications @ +25 °C, $Z_S = Z_L = 50 \text{ Ohms}$

| Parameter                           | Unit   | Minimum | Typical | Maximum |
|-------------------------------------|--------|---------|---------|---------|
| Input Frequency Range               | GHz    | 0.3     |         | 4.0     |
| Output Frequency Range              | MHz    | 3.125   |         | 41.67   |
| Fixed Divide Ratio                  |        |         | 96      |         |
| Input Power Range                   |        |         |         |         |
| $f = 0.3\text{GHz} - 1.0\text{GHz}$ | dBm    | -11     | -15     | +12     |
| $f = 1.0\text{GHz} - 4.0\text{GHz}$ | dBm    | -12     | -15     | +12     |
| Output Power to 50 Ohm Load         | dBm    |         | -1      |         |
| Output Voltage Swing (8pF Load)     | Vp-p   | 1.0     | 1.2     |         |
| SSB Phase Noise (100KHz Offset)     | dBc/Hz |         | -144    |         |
| DC Power Supply                     | V      | 7       | 12      | 15      |
| Supply Current                      | mA     |         | 75      |         |

**FPS Series**
**0.3 – 4.0GHz Divide-By-96 Prescaler**
**Absolute Maximum Ratings**

| Parameter             | Absolute Maximum  |
|-----------------------|-------------------|
| RF Input Power        | +13dBm            |
| Supply Voltage        | +16V              |
| Operating Temperature | -40 °C to +85 °C  |
| Storage Temperature   | -55 °C to +100 °C |

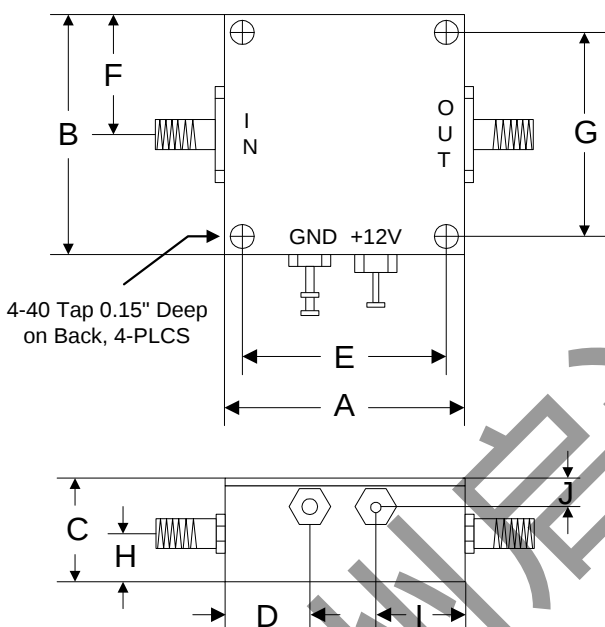**Outline**


|      | A     | B     | C     | D     | E     | F     | G     | H     | I     | J     |
|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Inch | 1.250 | 1.250 | 0.563 | 0.450 | 1.000 | 0.625 | 1.000 | 0.250 | 0.500 | 0.187 |
| mm   | 31.75 | 31.75 | 14.29 | 11.43 | 25.40 | 15.88 | 25.40 | 6.35  | 12.70 | 4.76  |