


GNA Series

1700 – 2100MHz Low Noise Amplifier

Features

- Frequency Range:1700–2100MHz
- Gain: 15dB
- P_{1dB}: +22dBm
- IP3: +33dBm
- Noise Figure: 0.8dB (typ.)
- DC Power: 12V @ 50mA
- SMA-female connectorized

Photo

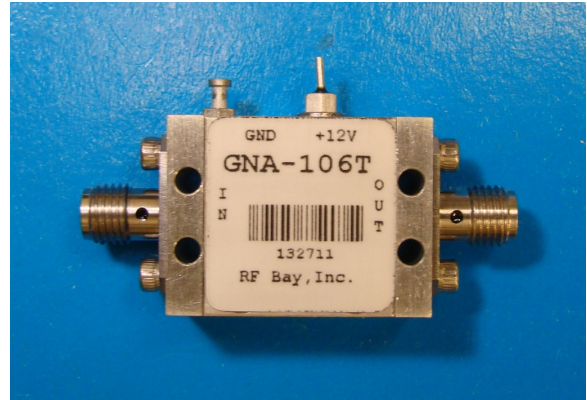

Description

GNA-106T is a high performance Microwave Low Noise (& Driver) Amplifier, with standard frequency range of 1700MHz to 2100MHz.







Electrical Specifications @+25 °C, Z_{in}=Z_{out}=50 Ohm, V_{supply} = +12VDC

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	1700		2100
Gain (S ₂₁) f = 1700MHz	dB		16.0	
f = 1900MHz	dB		15.3	
f = 2100MHz	dB		14.6	
Gain Variation Over Temperature	dB/°C		0.02	0.03
Output Power P _{1dB}	dBm	+20	+22	
Saturated Output Power P _{Sat}	dBm		+23	
Output Third Order Intercept IP3	dBm	+30	+33	
Noise Figure @1900MHz	dB		0.8	1.0
Reverse Isolation (S ₁₂) @1900MHz	dB		-22	
VSWR-Input (S ₁₁)	ratio:1	1.7@1700MHz	1.8@1900MHz	1.8@2100MHz
VSWR-Output (S ₂₂)	(unitless)	1.6@1700MHz	1.6@1900MHz	1.6@2100MHz
DC Power Supply - voltage	V	9	12	15
DC Power Supply - current	mA		50	95
Operating Temperature	°C	-40		+85
Size (RF/DC feedthru's excluded)	Inch	1.00 (L) x 0.75 (W) x 0.45 (H)		
Weight	Oz	0.6 (17 grams)		

GNA Series

1700 – 2100MHz Low Noise Amplifier







Typical Performance @+25 °C

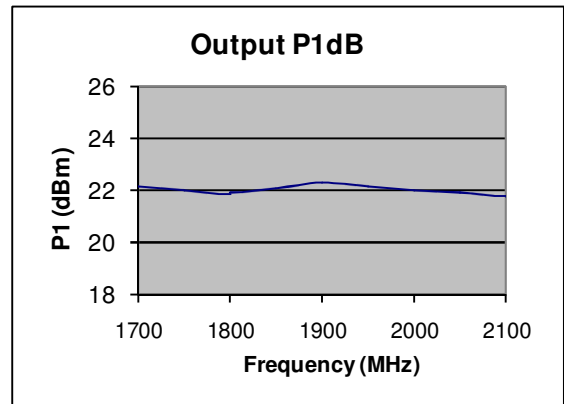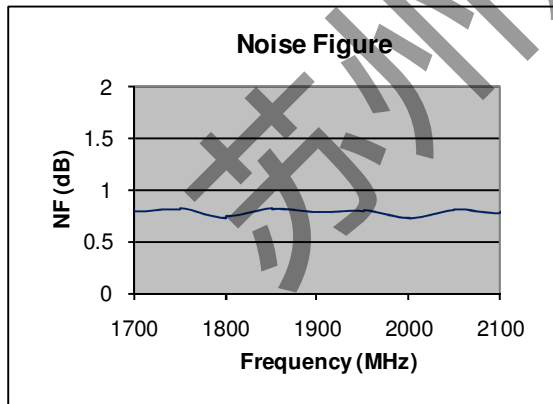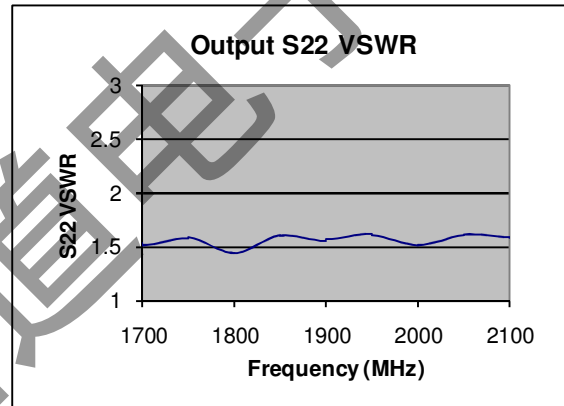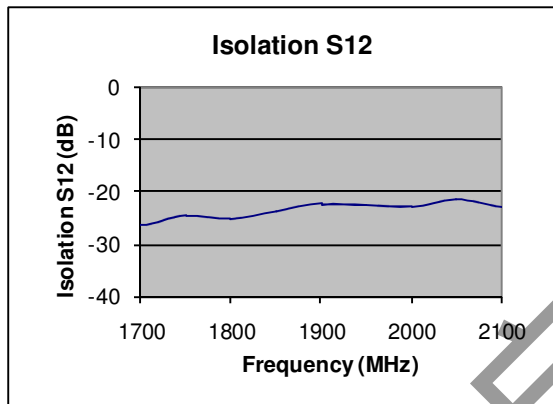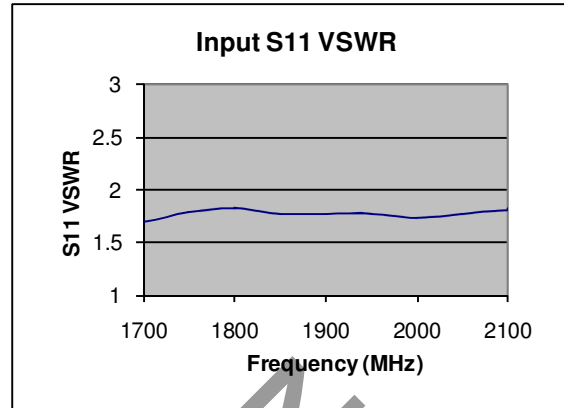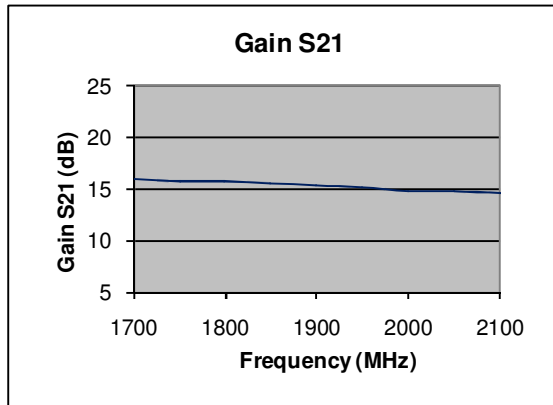

GNA Series

1700 – 2100MHz Low Noise Amplifier

Typical Performance @+25 °C

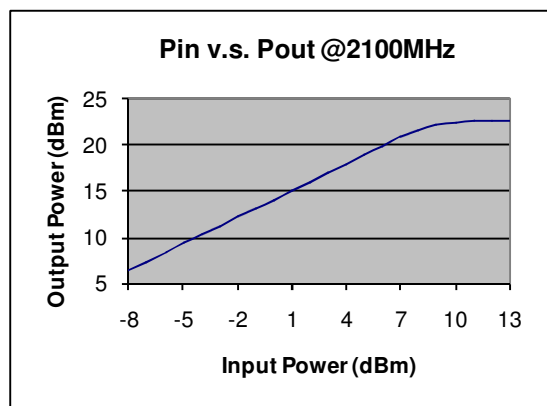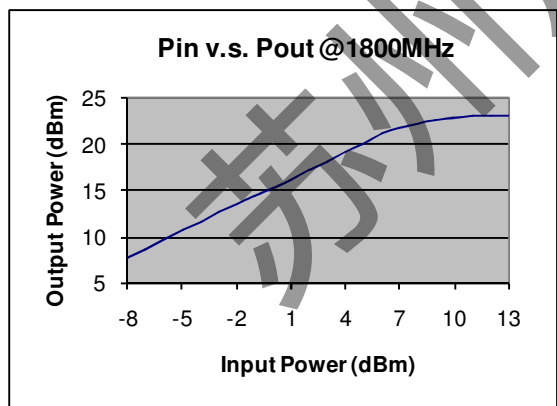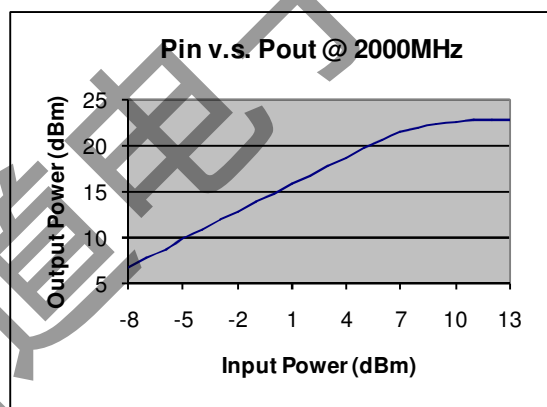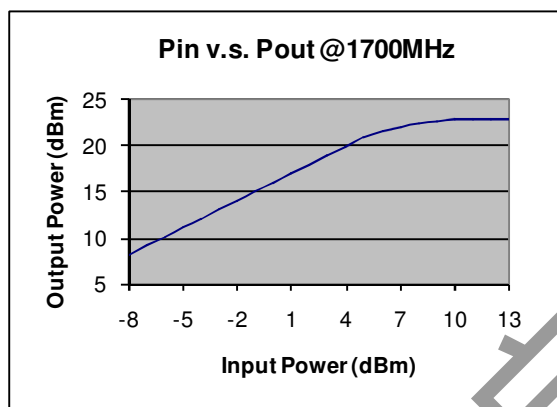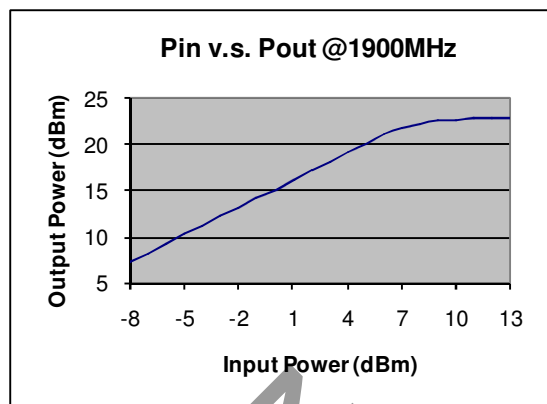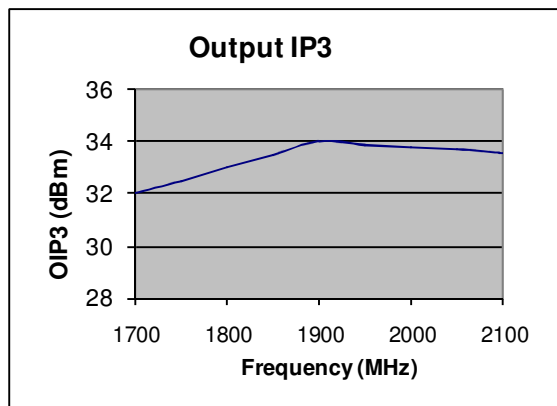

GNA Series

1700 – 2100MHz Low Noise Amplifier

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+20dBm
Supply Voltage (Survival)	+24V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

Outline

