


HPA Series

30 - 512MHz 10W RF Power Amplifier

Features

- Frequency Range: 30 - 512MHz
- Gain: 30dB @ $P_{out} = 10W$
- P_{out} : +40dBm
- Reverse Voltage Protection
- DC Power: +28V
- Class AB
- SMA Connector

Picture

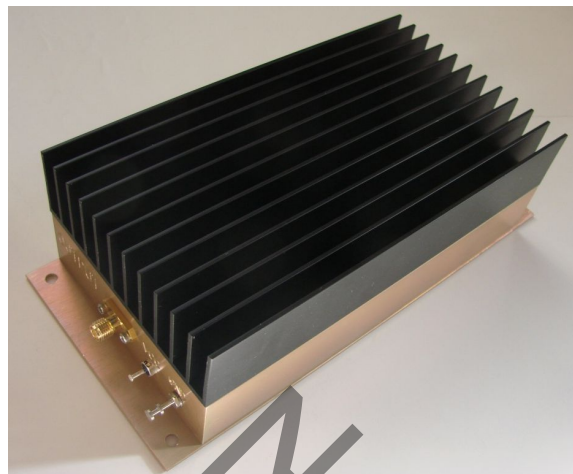

Description

HPA-250 is a 10Watt (+40dBm) output RF Power Amplifier designed and operated for FM application. It operates in Class AB mode from single 28V DC power supply with frequency range in 30 - 512MHz.







Electrical Specifications @ +25 °C, $Z_{in} = Z_{out} = 50 \Omega$, DC Supply = +28V

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	30		512
Gain S21 @ $P_{in} = +10dBm$	dB		30	
Output Power P_{out} @ $P_{in} = +10dBm$	dBm		+40	
Reverse Isolation S12 $f = 250MHz$	dB	-40	-48	
Noise Figure $f = 250MHz$	dB		5.0	6.0
Efficiency at $P_{out} = +40dBm$ $f = 250MHz$	%		38	
Input VSWR S11 $f = 250MHz$			1.1:1	1.5:1
DC Power Supply	V	+24	+28	+32
Supply Current Quiescent (no RF)	mA		200	220
@ $P_{out} = +40dBm$	mA		1000	1300
Size (Excluding SMA Connector)	inch	7.000" x 3.250" x 2.000"		
Weight	Oz.	24 (680g)		

HPA Series

30 - 512MHz 10W RF Power Amplifier







Typical Performance @ +25 °C

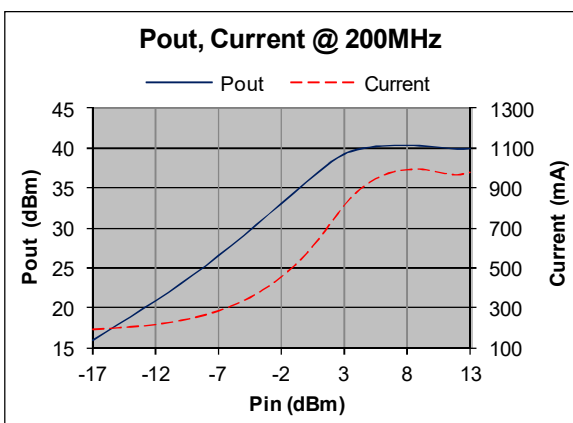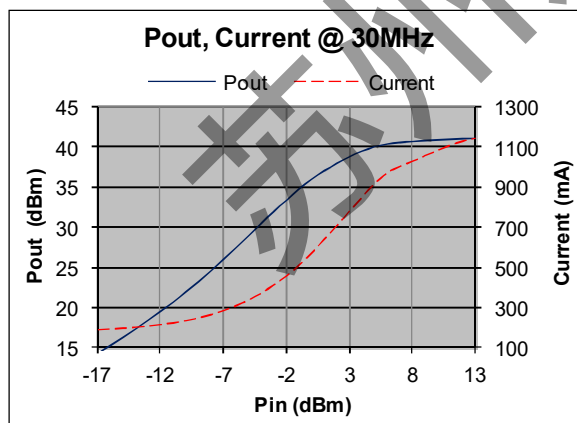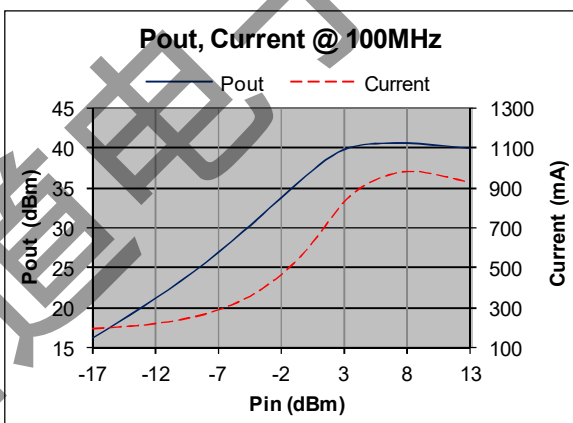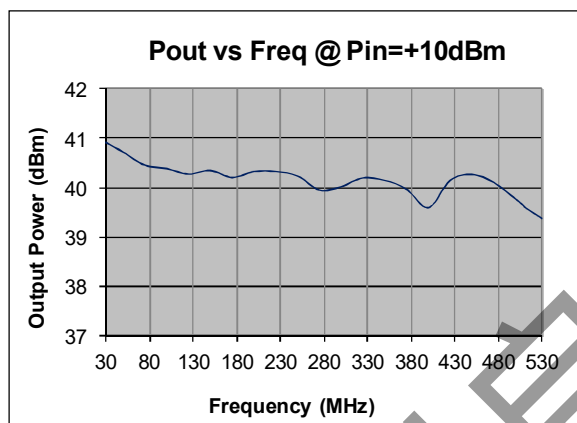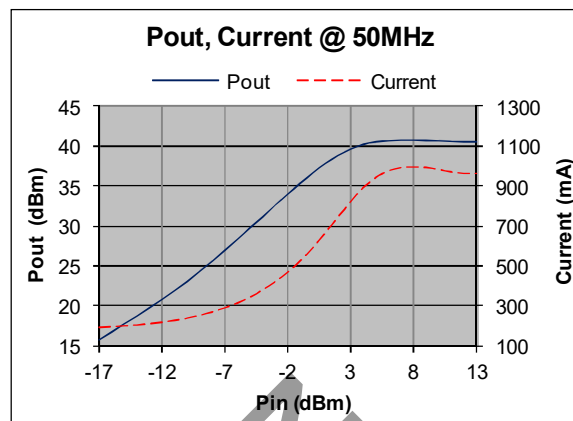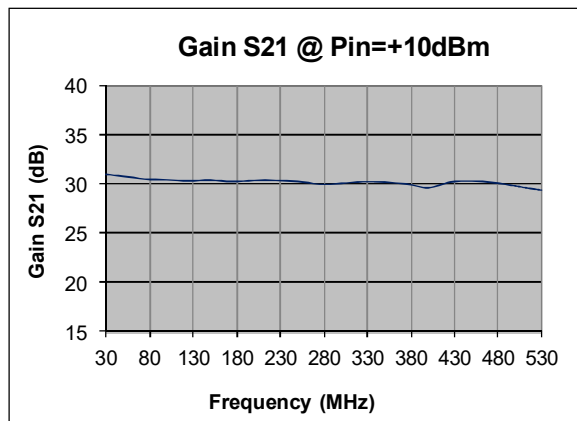

HPA Series

30 - 512MHz 10W RF Power Amplifier







Typical Performance @ +25 °C

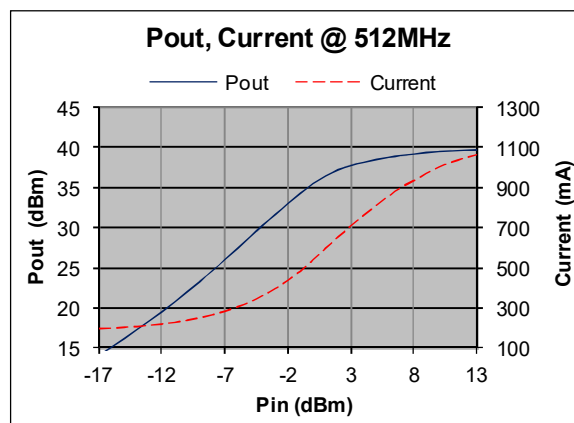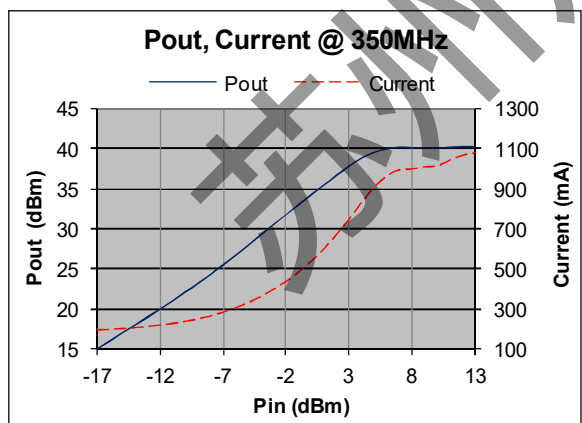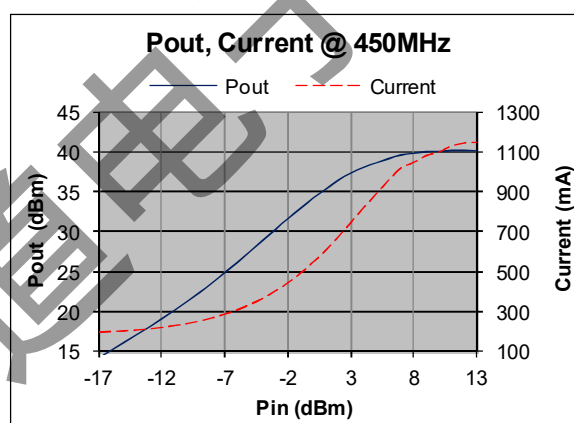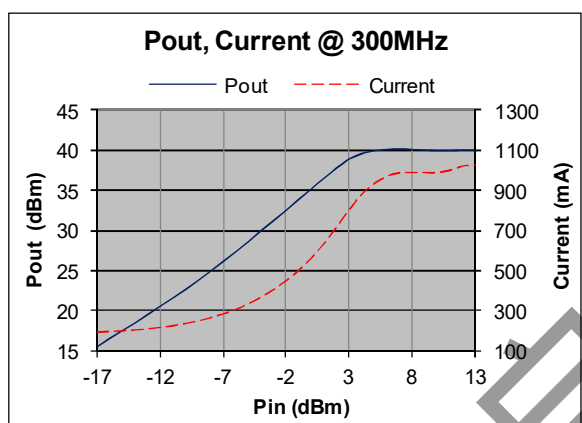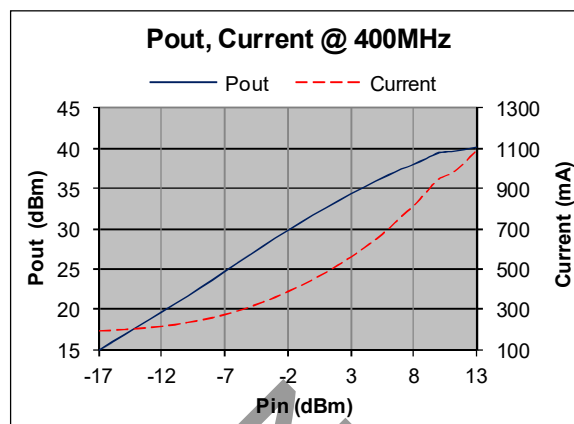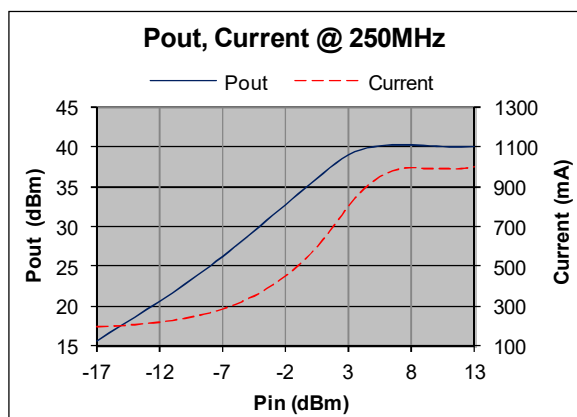

HPA Series

30 - 512MHz 10W RF Power Amplifier


Typical Performance @ +25 °C

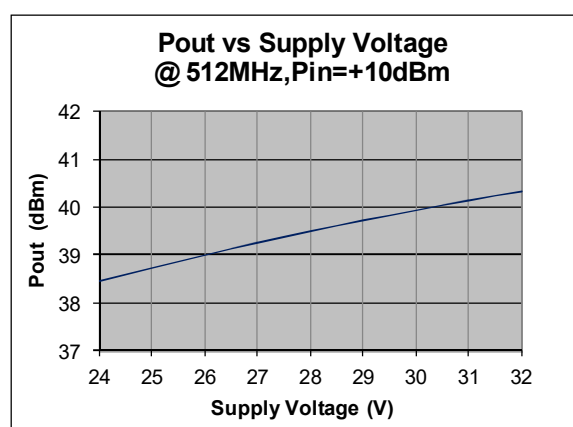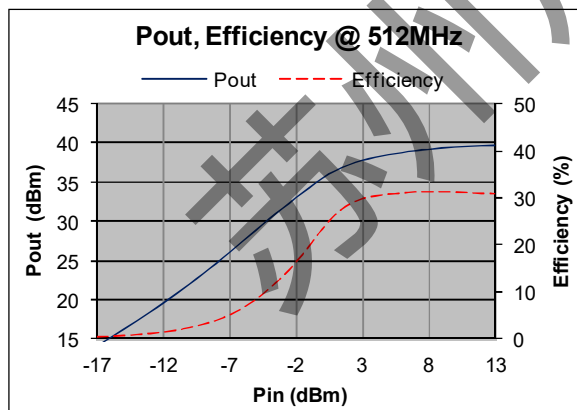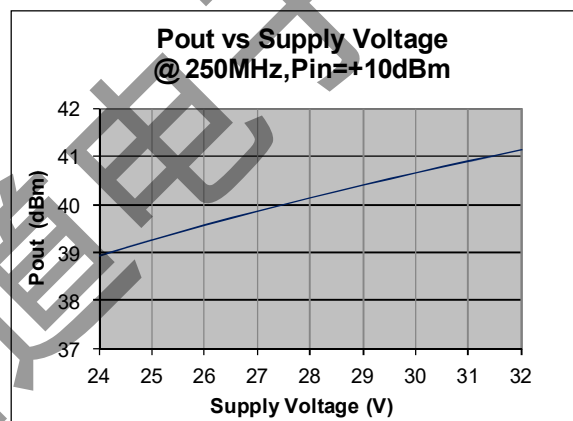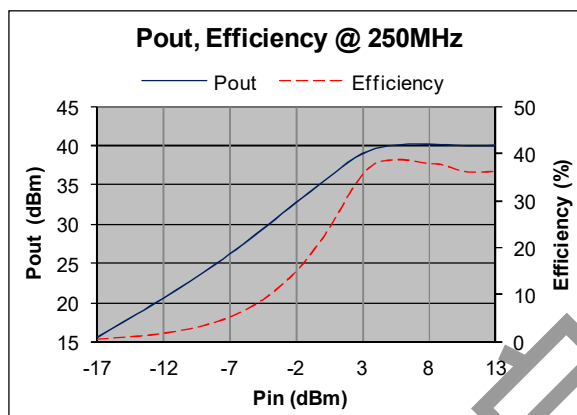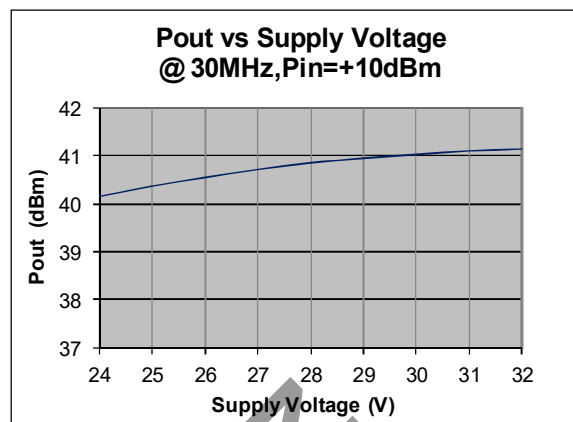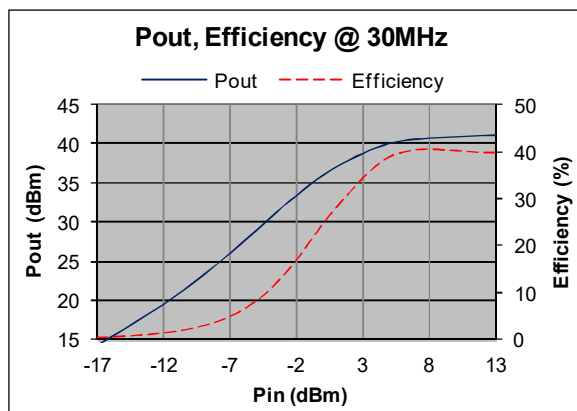

HPA Series

30 - 512MHz 10W RF Power Amplifier

Gain S21, Input VSWR S11 vs Frequency

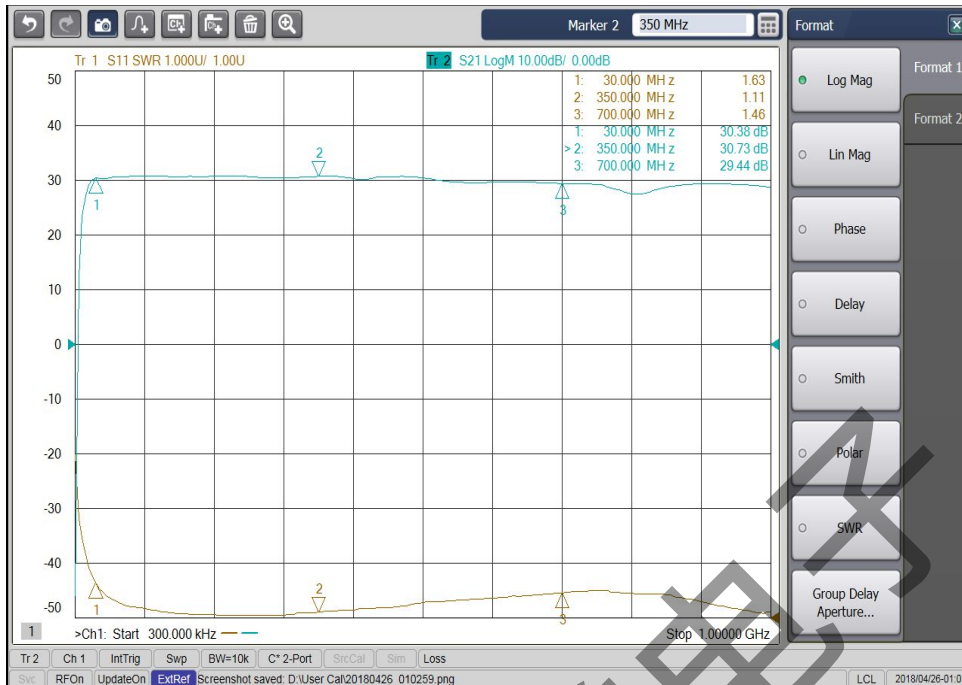

Noise Figure vs Frequency



HPA Series

30 - 512MHz 10W RF Power Amplifier


Absolute Maximum Ratings

Parameter	Absolute Maximum
Supply Voltage	+35V
RF Input Power	+15dBm
Operating Temperature	-30 °C to +65 °C
Storage Temperature	-55 °C to +125 °C

ESD Sensitive Material



Outline

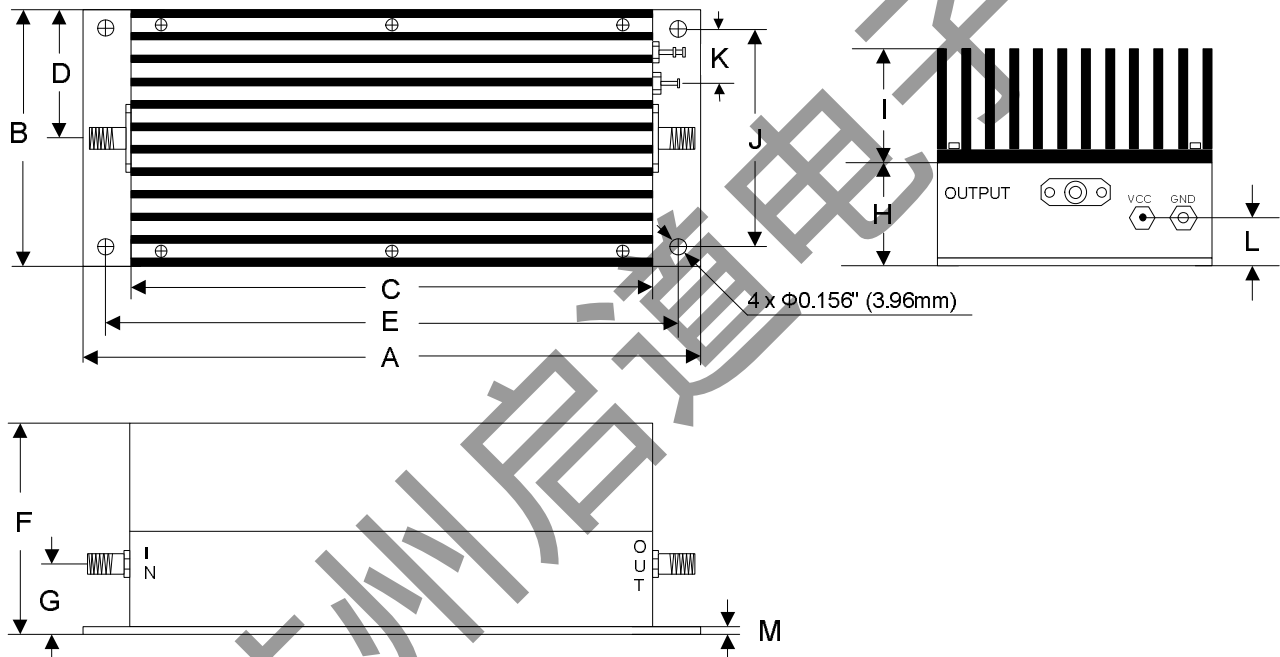

	A	B	C	D	E	F	G	H	I
Inch	7.000	3.250	6.000	1.625	6.500	2.000	0.650	1.000	1.000
mm	177.80	82.55	152.40	41.28	165.10	50.80	16.51	25.40	25.40
	J	K	L	M					
Inch	2.750	0.625	0.450	0.090					
mm	69.85	15.88	11.43	2.29					