



Type N Male Positive Lock for 3/8 in LDF2-50 cable

Product Classification

| | |
|---------------|----------------------------------|
| Product Type | Wireless and radiating connector |
| Product Brand | HELIAX® |


General Specifications

| | |
|---------------------------------|------------|
| Body Style | Straight |
| Cable Family | LDF2-50 |
| Inner Contact Attachment Method | Captivated |
| Inner Contact Plating | Silver |
| Interface | N Male |
| Mounting Angle | Straight |
| Outer Contact Attachment Method | Ring-flare |
| Outer Contact Plating | Trimetal |
| Pressurizable | No |

Dimensions

| | |
|--------------|--------------------|
| Height | 22.35 mm 0.88 in |
| Width | 22.35 mm 0.88 in |
| Length | 53.34 mm 2.1 in |
| Diameter | 22.35 mm 0.88 in |
| Nominal Size | 3/8 in |

Outline Drawing

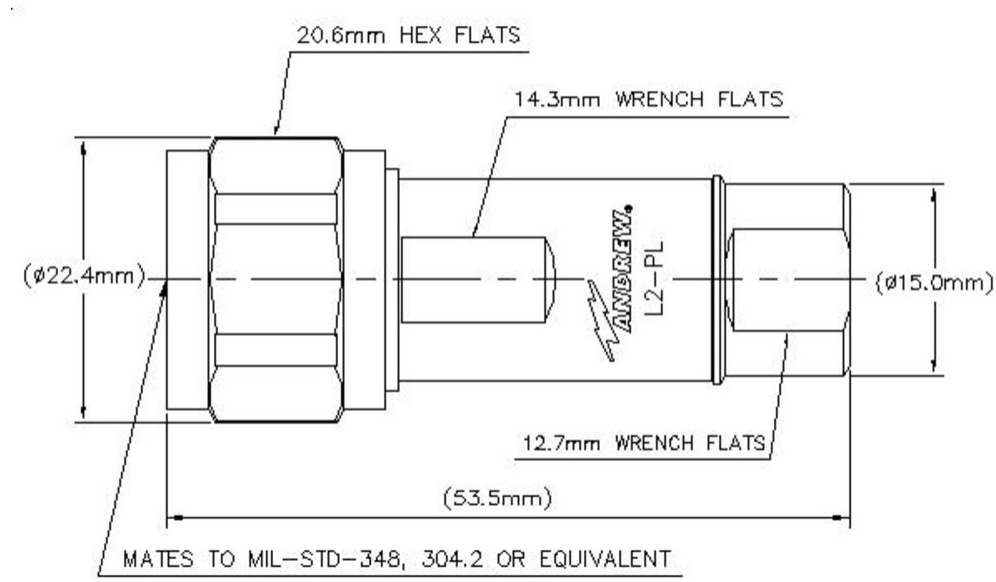

Electrical Specifications

| | |
|--------------------------------------|----------------------|
| 3rd Order IMD at Frequency | -107 dBm @ 910 MHz |
| 3rd Order IMD Test Method | Two +43 dBm carriers |
| Insertion Loss, typical | 0.05 dB |
| Average Power at Frequency | 0.7 kW @ 900 MHz |
| Cable Impedance | 50 ohm |
| Connector Impedance | 50 ohm |
| dc Test Voltage | 2500 V |
| Inner Contact Resistance, maximum | 1 mOhm |
| Insulation Resistance, minimum | 5000 MOhm |
| Operating Frequency Band | 0 – 12000 MHz |
| Outer Contact Resistance, maximum | 0.25 mOhm |
| Peak Power, maximum | 10 kW |
| RF Operating Voltage, maximum (vrms) | 707 V |
| Shielding Effectiveness | -110 dB |

VSWR/Return Loss

| | | |
|----------------|------|------------------|
| Frequency Band | VSWR | Return Loss (dB) |
| 0–960 MHz | 1.04 | 35 |

| | | |
|-----------------|------|------|
| 960–2200 MHz | 1.06 | 31.8 |
| 2200–2700 MHz | 1.06 | 31.8 |
| 2700–4000 MHz | 1.05 | 32.5 |
| 4000–6000 MHz | 1.1 | 26.8 |
| 6000–8000 MHz | 1.12 | 25.1 |
| 8000–10000 MHz | 1.12 | 25 |
| 10000–12000 MHz | 1.3 | 17.8 |

Mechanical Specifications

| | |
|--|---------------------------|
| Attachment Durability | 25 cycles |
| Connector Retention Tensile Force | 671.68 N 151 lbf |
| Connector Retention Torque | 2.7 N-m 23.897 in lb |
| Coupling Nut Proof Torque | 1.7 N-m 15.046 in lb |
| Coupling Nut Retention Force | 449.98 N 101.16 lbf |
| Coupling Nut Retention Force Method | MIL-C-39012C-3.25, 4.6.22 |
| Insertion Force | 27.98 N 6.29 lbf |
| Insertion Force Method | IEC 61169-1:15.2.4 |
| Interface Durability | 500 cycles |
| Interface Durability Method | IEC 61169-16:9.5 |
| Mechanical Shock Test Method | IEC 60068-2-27 |

Environmental Specifications

| | |
|---|---------------------------------------|
| Operating Temperature | -55 °C to +85 °C (-67 °F to +185 °F) |
| Storage Temperature | -65 °C to +125 °C (-85 °F to +257 °F) |
| Attenuation, Ambient Temperature | 20 °C 68 °F |
| Average Power, Ambient Temperature | 40 °C 104 °F |
| Average Power, Inner Conductor Temperature | 100 °C 212 °F |
| Corrosion Test Method | IEC 60068-2-11 |
| Immersion Depth | 1 m |
| Immersion Test Mating | Mated |
| Immersion Test Method | IEC 60529:2001, IP68 |
| Moisture Resistance Test Method | IEC 60068-2-3 |
| Thermal Shock Test Method | IEC 60068-2-14 |

Vibration Test Method

IEC 60068-2-6

Packaging and Weights

Weight, net

42.96 g | 0.095 lb

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Below maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant |



* Footnotes

| | |
|-------------------------|--|
| Insertion Loss, typical | 0.05v~freq (GHz) (not applicable for elliptical waveguide) |
| Immersion Depth | Immersion at specified depth for 24 hours |