

LNA Series

700 – 2000MHz Low Noise Amplifier

Features


- Frequency Range: 700 – 2000MHz
- Gain: 35dB
- P_{1dB}: +23dBm
- IP3: +37dBm
- Noise Figure: 0.8dB (typ.)
- DC Power: 12V @ 170mA
- SMA-female connectorized

Performance measured @ 1350MHz

Description

LNA-1350 is a 0.8dB Noise Figure Low Noise Amplifier operates with frequency range from 700 to 2000MHz.

Photo

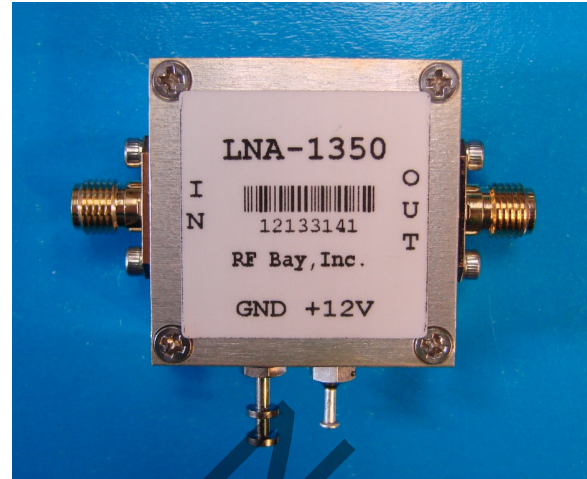







Electrical Specifications @+25 °C, Z_{in}=Z_{out}=50 Ohm, V_{supply} = +12VDC

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	700		2000
Gain (S21) f = 700MHz	dB		42	
f = 1000MHz	dB		39	
f = 1350MHz	dB		35	
f = 1700MHz	dB		33	
f = 2000MHz	dB		31	
Output Power P _{1dB}	dBm		+23	
Output Third Order Intercept IP3	dBm		+37	
Noise Figure @1350MHz	dB		0.8	1.0
Reverse Isolation (S12) @1350MHz	dB		-39	
VSWR-Input (S11)	ratio:1	1.5@700MHz	1.6@1350MHz	1.9@2000MHz
VSWR-Output (S22)	(unitless)	1.4@700MHz	1.2@1350MHz	2.2@2000MHz
DC Power Supply - voltage	V	11	12	13
DC Power Supply - current	mA		170	210
Operating Temperature	°C	-40		+85
Size (RF/DC feedthru's excluded)	Inch	1.25 (L) x 1.25 (W) x 0.56 (H)		
Weight	Oz	1.6 (45 grams)		

LNA Series

700 – 2000MHz Low Noise Amplifier







Typical Performance @+25 °C

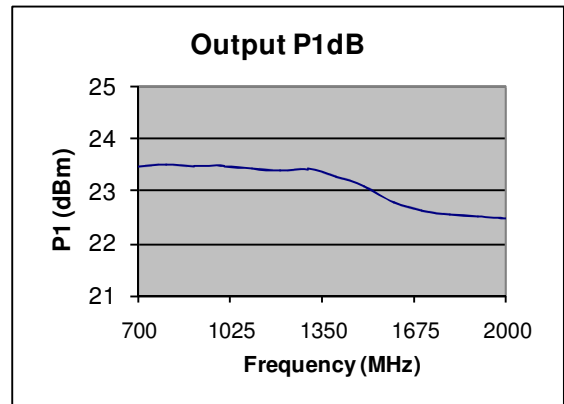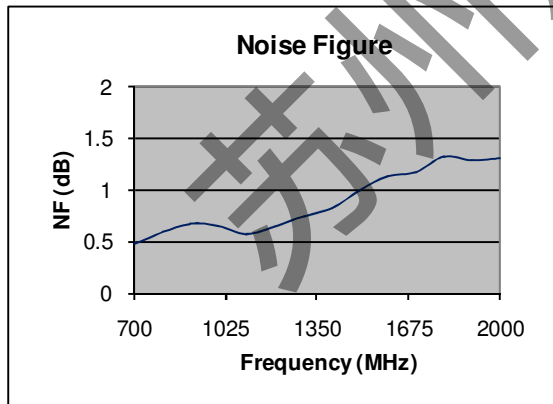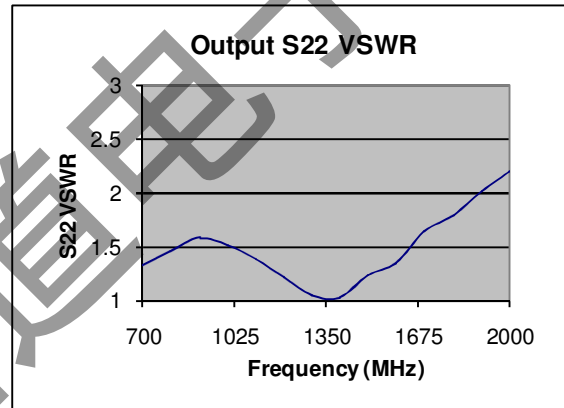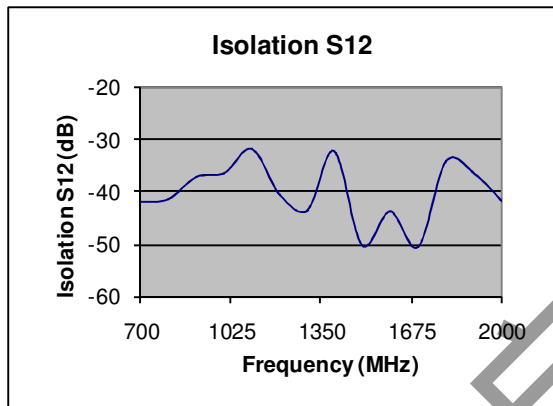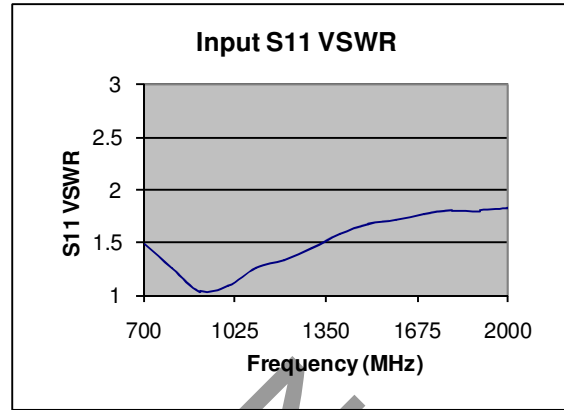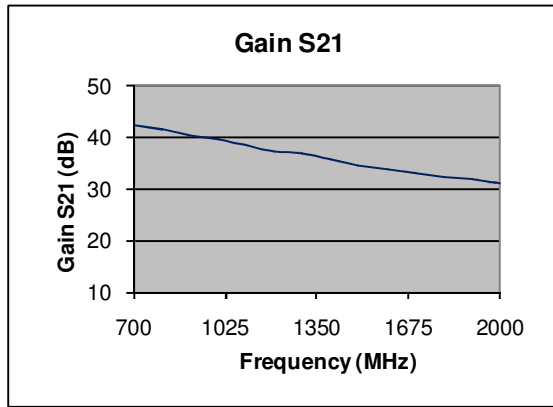

LNA Series

700 – 2000MHz Low Noise Amplifier

Typical Performance @+25 °C

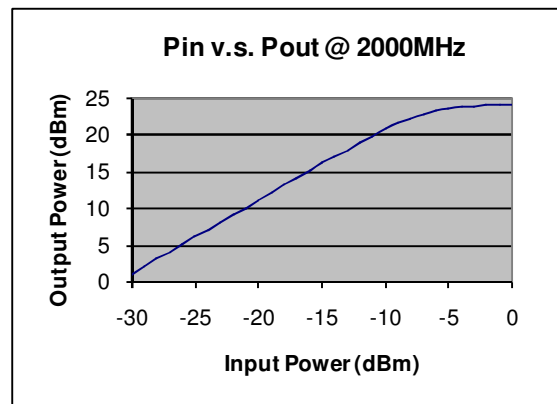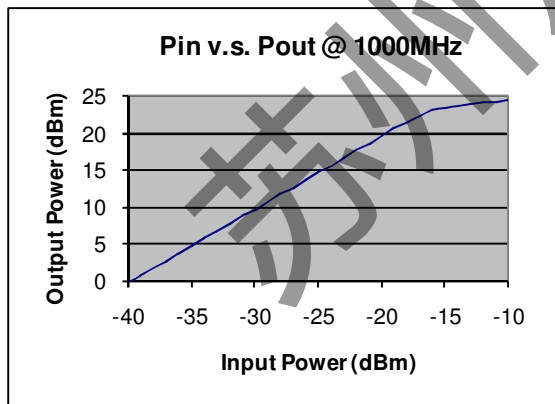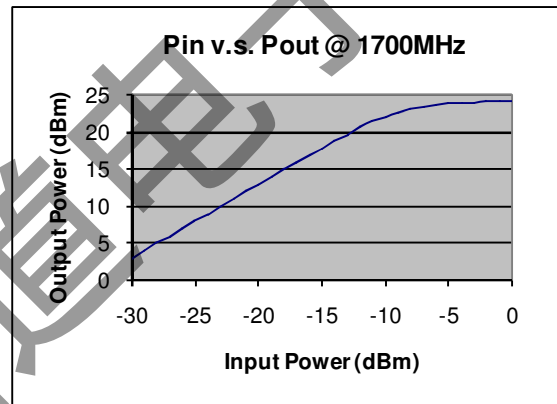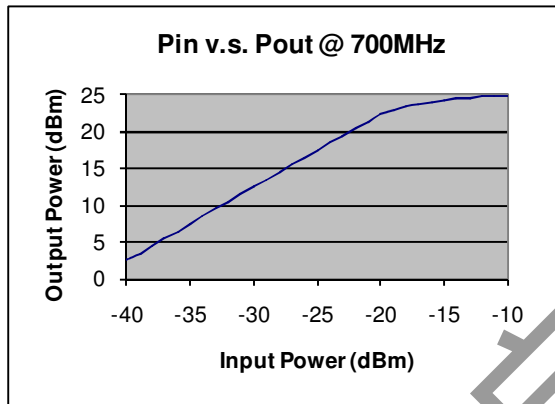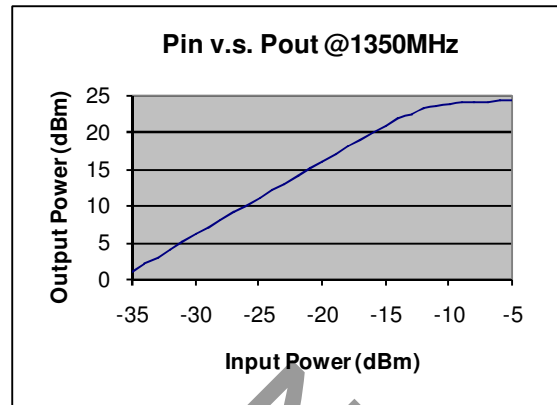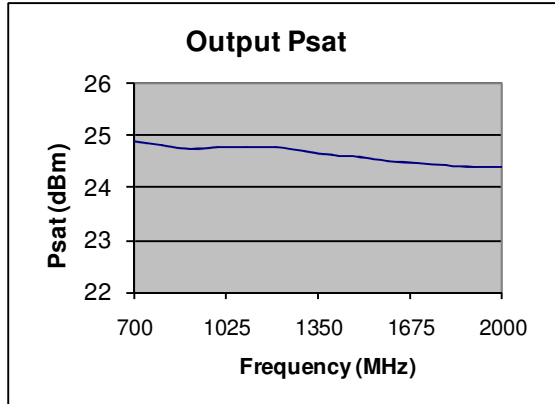


LNA Series

700 – 2000MHz Low Noise Amplifier

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+13dBm
Supply Voltage	+15V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

Outline

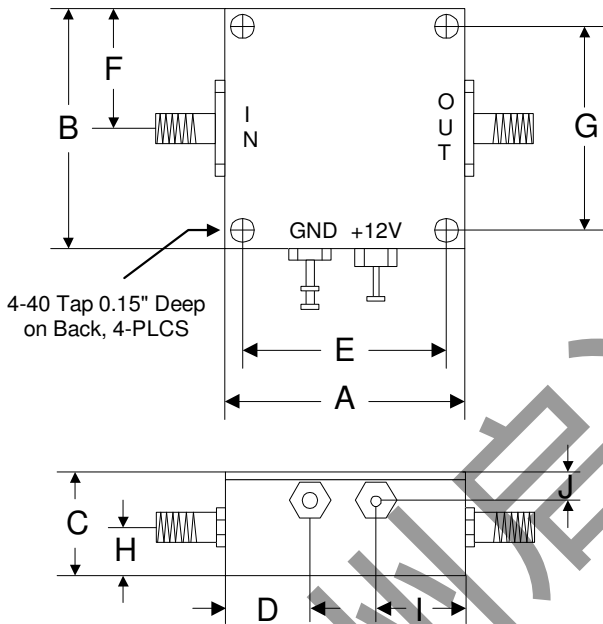

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76