

LNA Series

10 – 1500MHz Low Noise Amplifier

Features

- Frequency Range: 10-1500MHz
- Gain: 26dB
- P_{1dB}: +10dBm
- IP3: +23dBm
- Noise Figure: 3.3dB
- DC Power: 12V
- SMA Connector

Performance measured @ 1500MHz

Description

LNA-1500 is a wideband Low Noise Amplifier operates with frequency range usable from 10 to 1500MHz.

Picture









Electrical Specifications @ +25 °C

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	10		1500
Gain	f = 40MHz	dB	28	
	f = 500MHz	dB	28	
	f = 1500MHz	dB	26	
P _{1dB}	f = 40MHz	dBm	+12	
	f = 500MHz	dBm	+12	
	f = 1500MHz	dBm	+10	
IP3	f = 1500MHz	dBm	+23	
Noise Figure	f = 10MHz	dB	2.9	
	f = 500MHz	dB	3.3	
	f = 1500MHz	dB	3.3	
VSWR	f = 1500MHz			
	Input VSWR		1.5:1	
	Output VSWR		2.0:1	
DC Power Supply	V	9	12	15
Supply Current	mA		45	

LNA Series

10 – 1500MHz Low Noise Amplifier

Typical Performance @ +25 °C

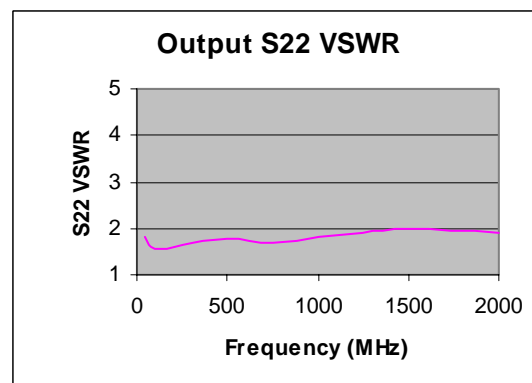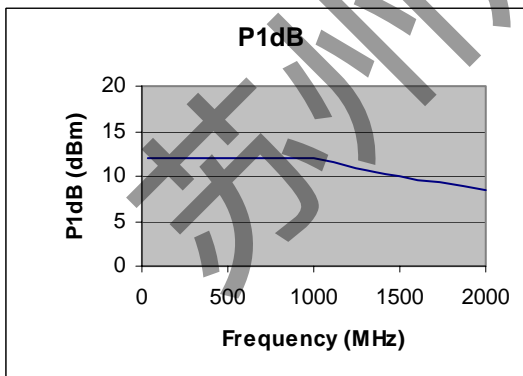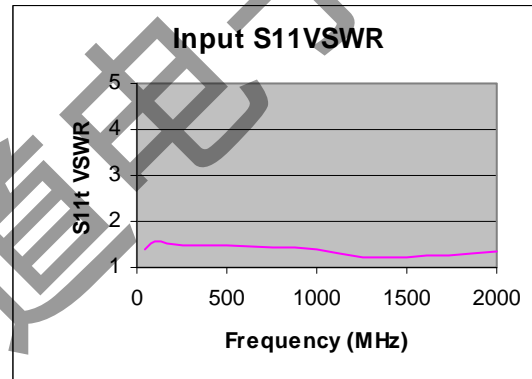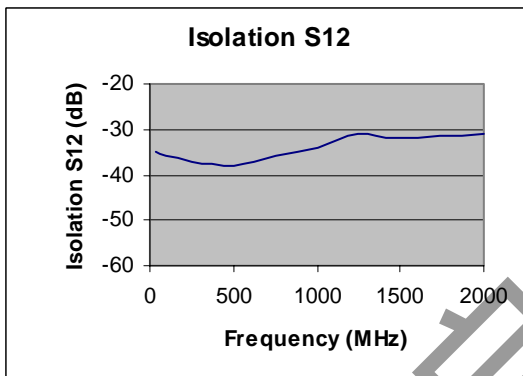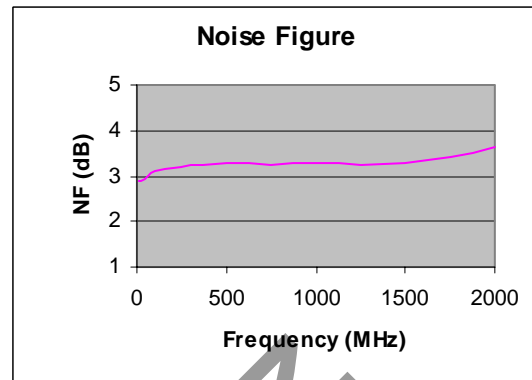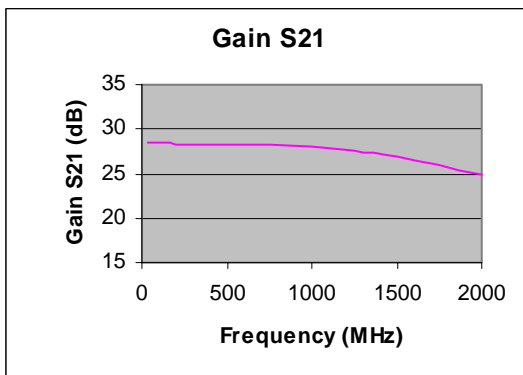


LNA Series

10 – 1500MHz Low Noise Amplifier

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+13dBm
Supply Voltage	+16V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

Outline

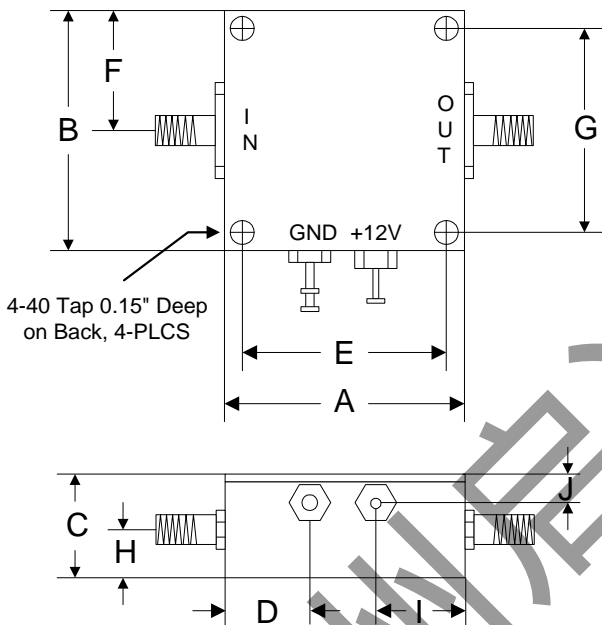

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76