

## LNA Series

## 20 – 1500MHz Low Noise Amplifier

### Features

- Frequency Range: 20 - 1500MHz
- Gain: 20dB
- P<sub>1dB</sub>: +17dBm
- IP3: +35dBm
- Noise Figure: 1dB
- Internally Voltage Regulated
- Reverse Voltage Protected
- DC Power: 12V/70mA
- SMA Connector

### Picture



### Description

LNA-1520 is a 1dB Noise Figure Low Noise Amplifier operates with frequency range from 20MHz to 1500MHz.


### Electrical Specifications @ +25 °C, Z<sub>in</sub> = Z<sub>out</sub> = 50 Ω, DC Voltage = +12V

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	20		1500
Gain S <sub>21</sub>	f = 20MHz	18	20	
	f = 750MHz	18	20	
	f = 1500MHz	16	18	
Gain Flatness	dB		± 1.2	± 1.6
P <sub>1dB</sub>	f = 750MHz	+15	+17	
IP3	f = 750MHz	+32	+35	
Noise Figure	f = 750MHz		1.0	1.5
Reverse Isolation S <sub>12</sub>	f = 750MHz	-20	-24	
Input VSWR S <sub>11</sub>	f = 750MHz		1.5:1	2.0:1
Output VSWR S <sub>22</sub>	f = 750MHz		1.5:1	2.0:1
DC Power Supply	V	9	12	18
Supply Current	mA		70	85


## LNA Series

## 20 – 1500MHz Low Noise Amplifier

### Gain S21, Isolation S12, Return Loss S11, S22 vs Frequency

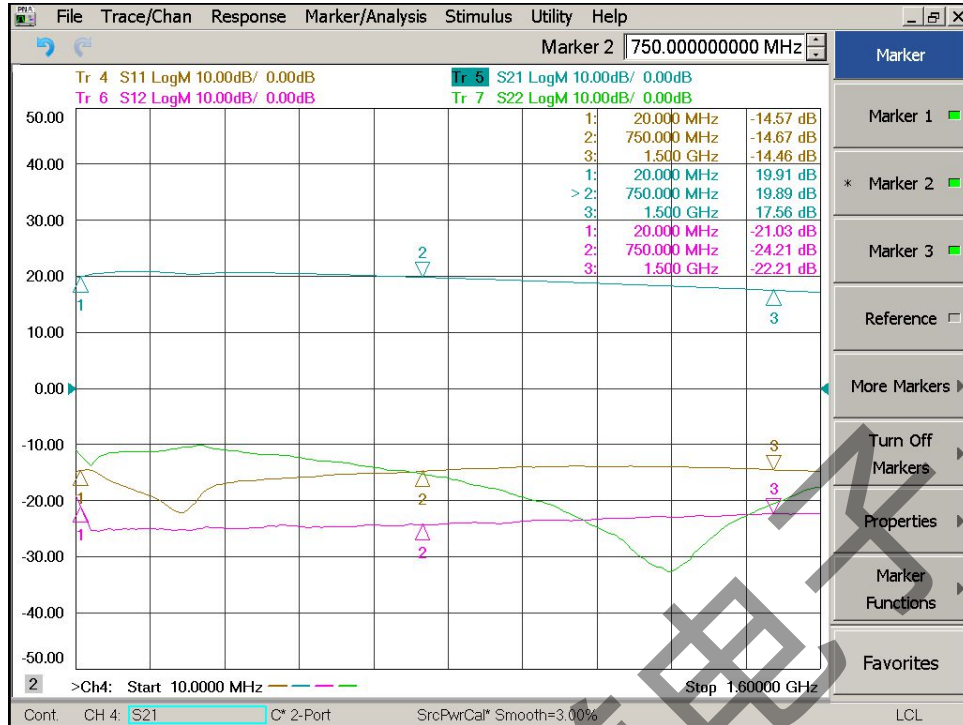


### Noise Figure vs Frequency

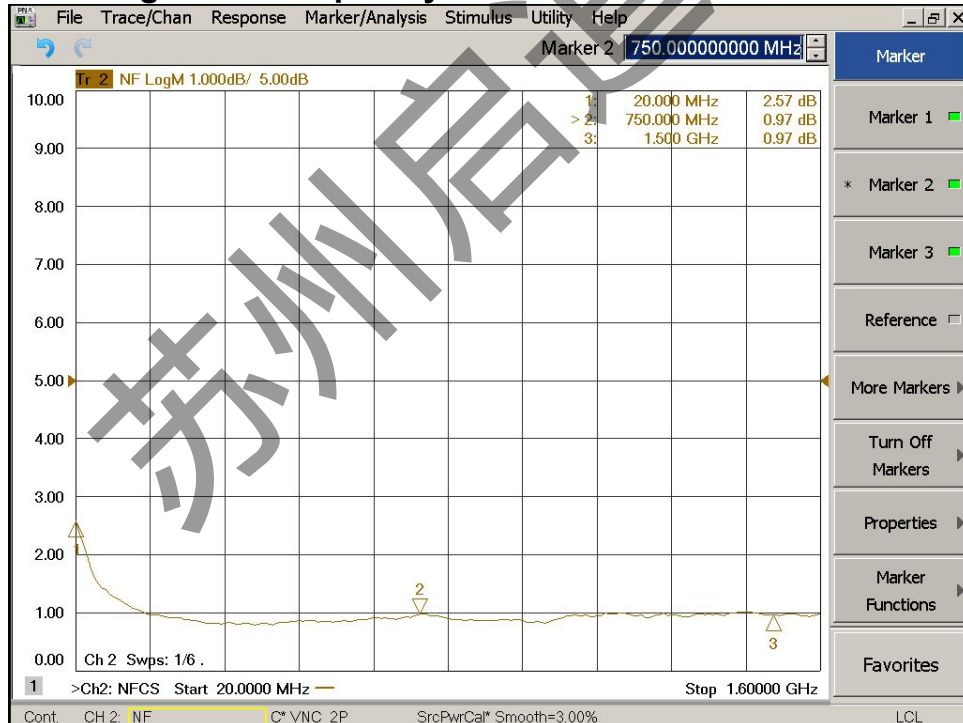


## LNA Series

## 20 – 1500MHz Low Noise Amplifier

### Output P1dB vs Frequency

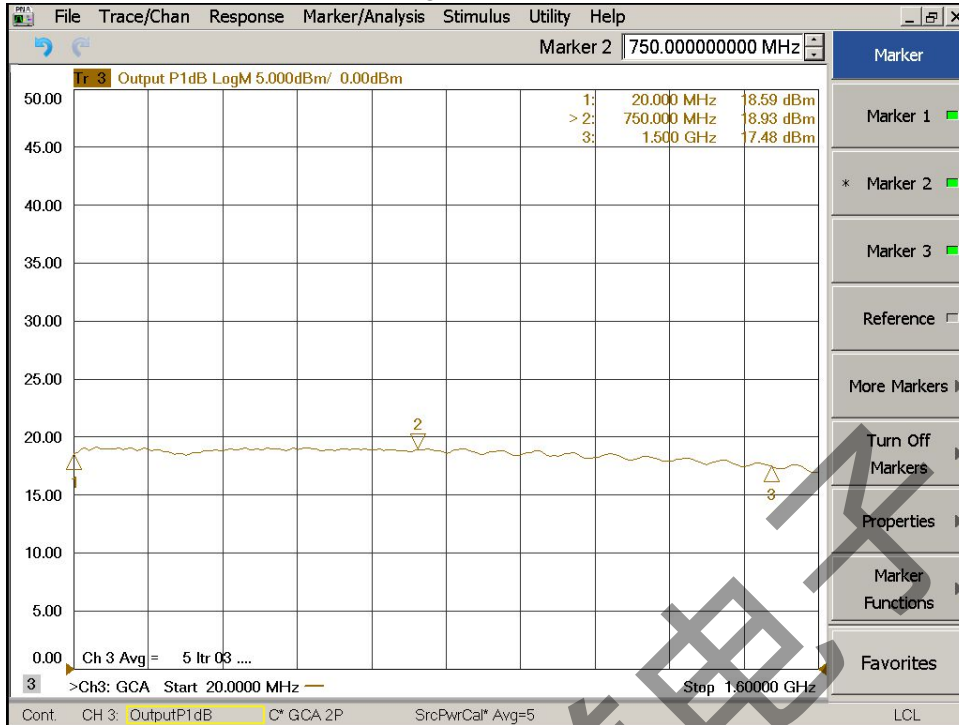

### Output IP3 vs Frequency

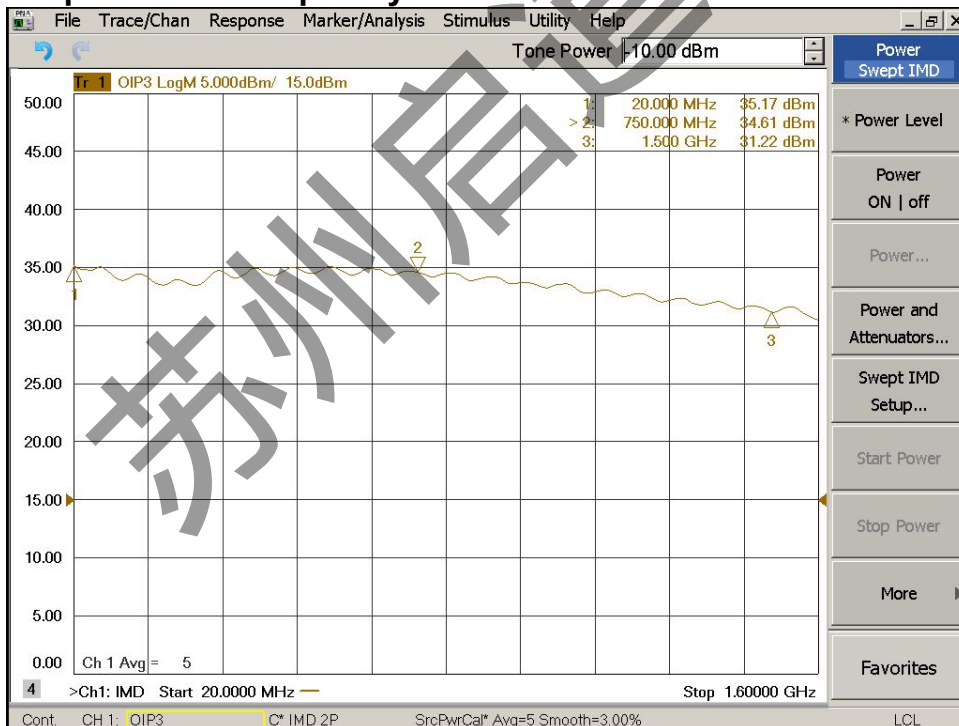

## LNA Series

## 20 – 1500MHz Low Noise Amplifier


### Absolute Maximum Ratings

Parameter	Absolute Maximum
Supply Voltage	+25V
RF Input Power	+13dBm
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

### ESD Sensitive Material



### Outline

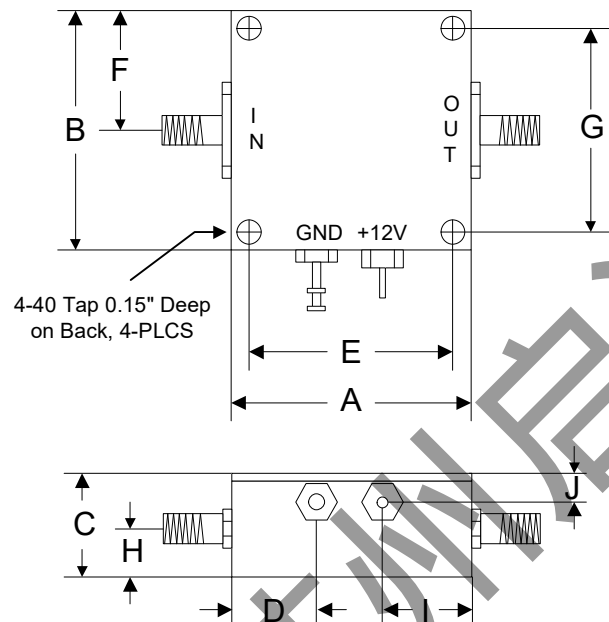

	A	B	C	D	E	F	G	H	I	J
<b>Inch</b>	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
<b>mm</b>	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76