

LNA Series

880 – 960MHz Low Noise Amplifier

Features

- Frequency Range: 880-960MHz
- Gain: 23dB
- P_{1dB}: +13dBm
- IP3: +25dBm
- Noise Figure: 1.2dB
- DC Power: 6 - 24V
- SMA Connector

Performance measured @ 920MHz

Description

LNA-900 is a 1.2dB Noise Figure Low Noise Amplifier operates with frequency range usable from 880 to 960MHz.

Picture









Electrical Specifications @ +25 °C

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	880		960
Gain	f = 880MHz		23	
	f = 920MHz	22	23	
	f = 960MHz		23	
P _{1dB}	f = 920MHz		+13	
IP3	f = 920MHz		+25	
Noise Figure			1.2	1.3
Reverse Isolation			-30	
VSWR	f = 920MHz			
	Input VSWR		2.4:1	
	Output VSWR		1.4:1	
DC Power Supply	V	6	12	24
Supply Current	mA		25	

LNA Series

880 – 960MHz Low Noise Amplifier

Typical Performance @ +25 °C

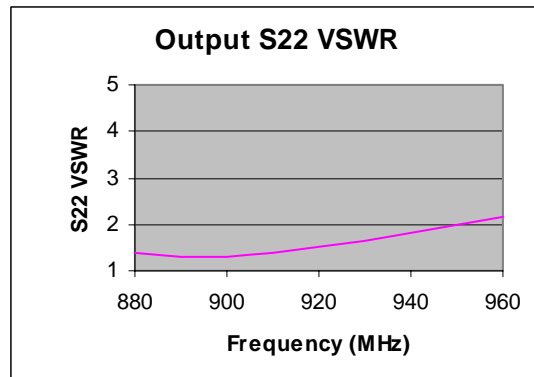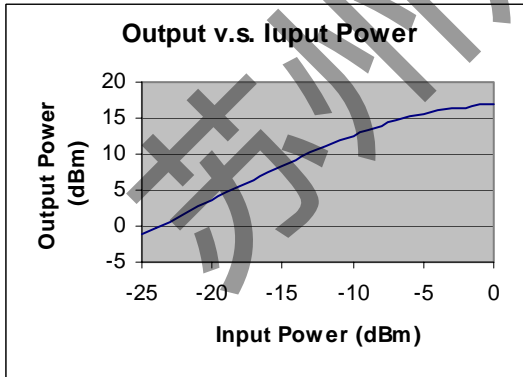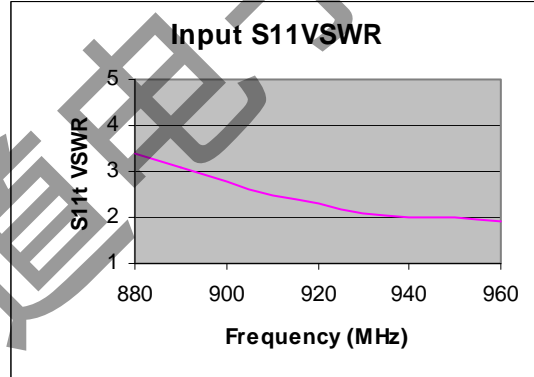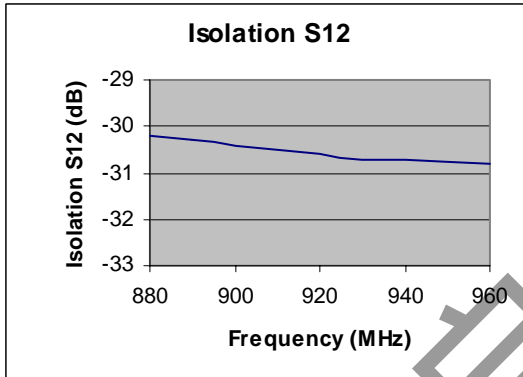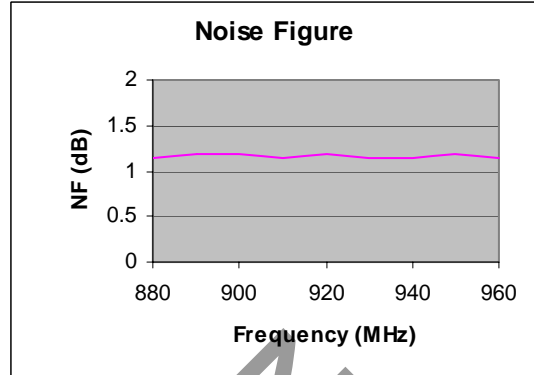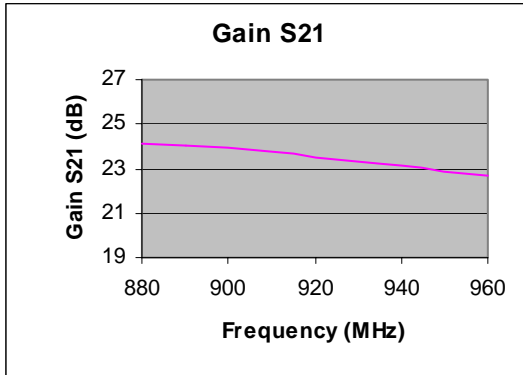


LNA Series

880 – 960MHz Low Noise Amplifier

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+15dBm
Supply Voltage	+25V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

Outline

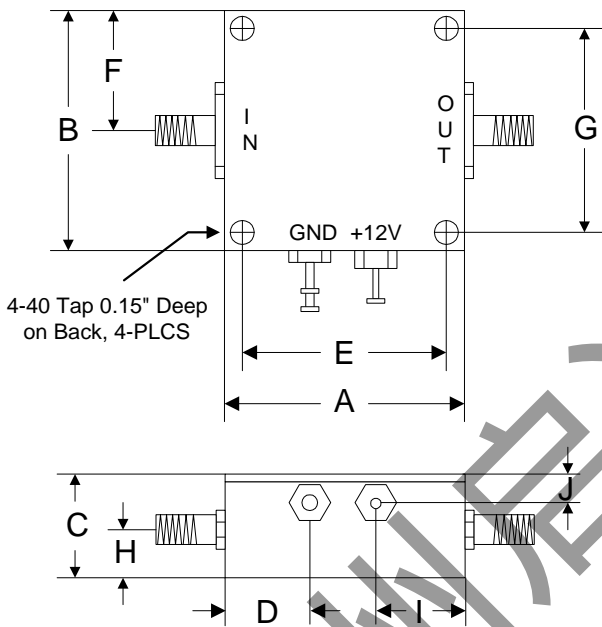

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76