


SW-0.5G18G-3A-S is a single pole, three throw, absorptive switch designed to operate over the 0.5 to 18GHz frequency range. This model is designed to handle 23dBm max input power. The switch offers fast switching speeds of 50nsec max., low insertion loss of 3.3dB and high isolation of 80dB. The DC supplies are 90mA @ ±5 V.

Mechanical Outline(Unit: Inch):

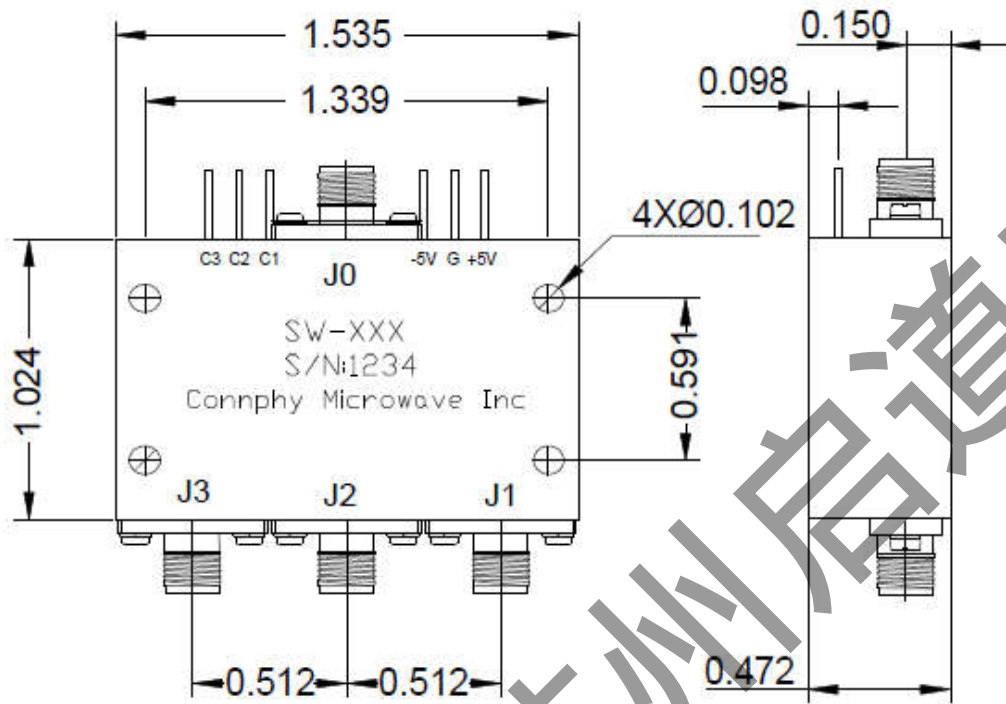

Specifications:

Frequency: 0.5 to 18GHz
 Insertion Loss: 3.3dB max
 Isolation: 80dB min
 Switching Speed: 50ns max
 Power Handling: 23dBm max
 VSWR: 2.0:1 max
 Voltage/Current: 90mA @ ±5V typical
 Control logic: TTL
 Connectors: SMA Female
 Type: Absorptive
 TTL Truth Table: Cn=0, Others=1;
 Path State: J0-Jn

Environmental Ratings:

Temperature: -25°C to +71 °C Operating
 -65 °C to +100 °C Non-Operating
 Vibration: MIL-STD-202F, Method 204D Cond. B
 Altitude: MIL-STD-202F, Method 105C Cond. B
 Temperature Cycle: MIL-STD-202F, Method 107D Cond. A

Pin Diode Switch SW-0.5G18G-3A-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@qiidao.com
CHECKRD:	DATE: 20/05/16	SHEET : 1 OF 1	
ISSUED:	SIZE:	SCALE : N / A	Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.