


SW-0.5G2G-4A-S is a single pole, four throw, absorptive switch designed to operate over the 0.5 to 2.0GHz frequency range. This model is designed to handle 23dBm max input power. The switch offers fast switching speeds of 50nsec max., low insertion loss of 1.8dB and high isolation of 80dB. The DC supplies are 120mA @ ±5 V.

Mechanical Outline(Unit: Inch):

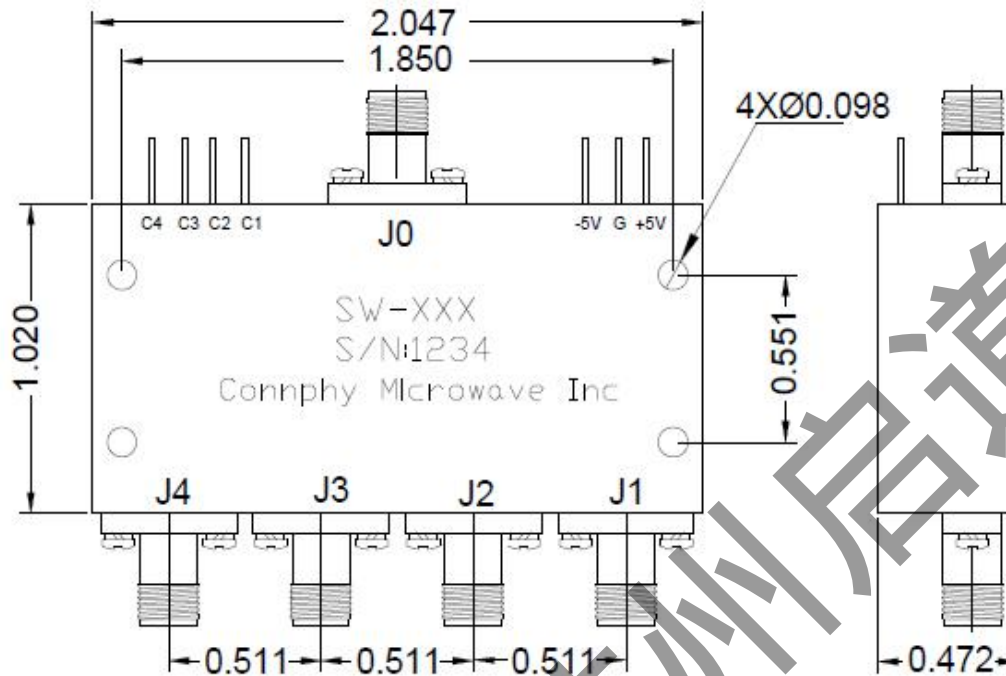

Specifications:

| | |
|------------------|--------------------------------------|
| Frequency: | 0.5 to 2GHz |
| Insertion Loss: | 1.8dB max |
| Isolation: | 80dB min |
| Switching Speed: | 50ns max |
| Power Handling: | 23dBm max |
| VSWR: | 1.5:1 max |
| Voltage/Current: | 120mA @ ±5 V typical |
| Control logic: | TTL |
| Connectors: | SMA Female |
| Type: | Absorptive |
| TTL Truth Table: | Cn=0, Others=1; Path State: J0-Jn |

Environmental Ratings:

| | |
|--------------|--|
| Temperature: | -25°C to +71 °C Operating -65 °C to +100 °C Non-Operating |
| Vibration: | MIL-STD-202F, Method 204D Cond. B |
| Altitude: | MIL-STD-202F, Method 105C Cond. B |

Pin Diode Switch SW-0.5G2G-4A-S

| | | | |
|----------|-------------------|----------------------|--|
| DRAWN: | DWG NO.: | REV CODE: Rev.1.0 | www.connphy.com sales@qiidao.com |
| CHECKRD: | DATE: 20/05/16 | SHEET : 1 OF 1 | |
| ISSUED: | SIZE: A | SCALE : N / A | |
| | | | Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE. |