


**SW-18G26.5G-01A-S** is a single pole, single throw, absorptive switch designed to operate over the 18 to 26.5GHz frequency range. This model is designed to handle 23dBm max input power. The switch offers fast switching speeds of 50nsec max., low insertion loss of 3.0dB and high isolation of 70dB. The DC supplies are 30mA @ ±5 V.

**Mechanical Outline(Unit: Inch):**

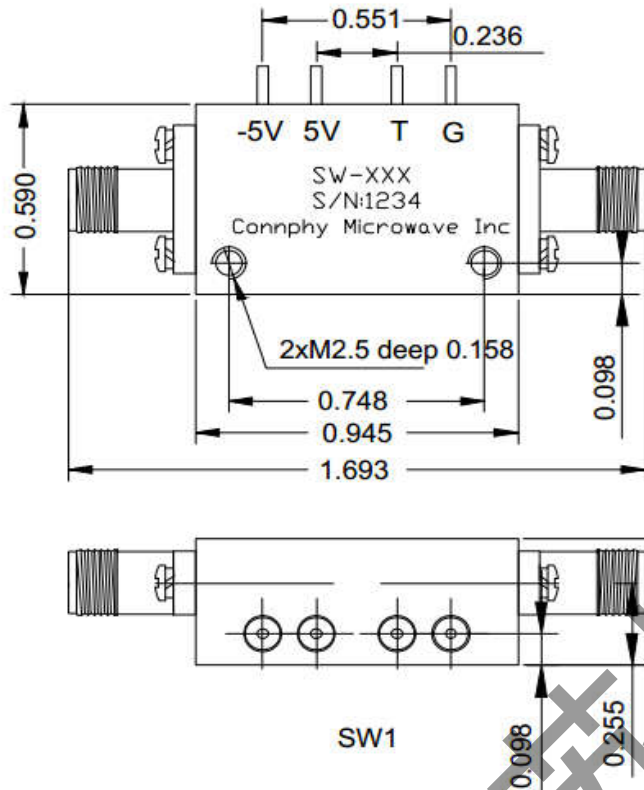


**Specifications:**

Frequency:	18 to 26.5GHz
Insertion Loss:	3.0dB max
Isolation:	70dB min
Switching Speed:	50ns max
Power Handling:	23dBm max
VSWR:	2.0 :1 max
Voltage/Current:	30mA @ ±5 V typical
Control logic:	TTL
Connectors:	SMA Female
Type:	Absorptive

**Environmental Ratings:**

Temperature:	-25°C to +71 °C Operating
	-65 °C to +100 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Pin Diode Switch			
SW-18G26.5G-01A-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@qiidao.com">sales@qiidao.com</a>
CHECKRD:	DATE: 20/05/16	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.