


**SW-18G26.5G-4A-S** is a single pole, four throw, absorptive switch designed to operate over the 18 to 26.5GHz frequency range. This model is designed to handle 23dBm max input power. The switch offers fast switching speeds of 200nsec max., low insertion loss of 5.0dB and high isolation of 50dB. The DC supplies are 120mA @ ±5 V.

### Mechanical Outline(Unit: Inch):

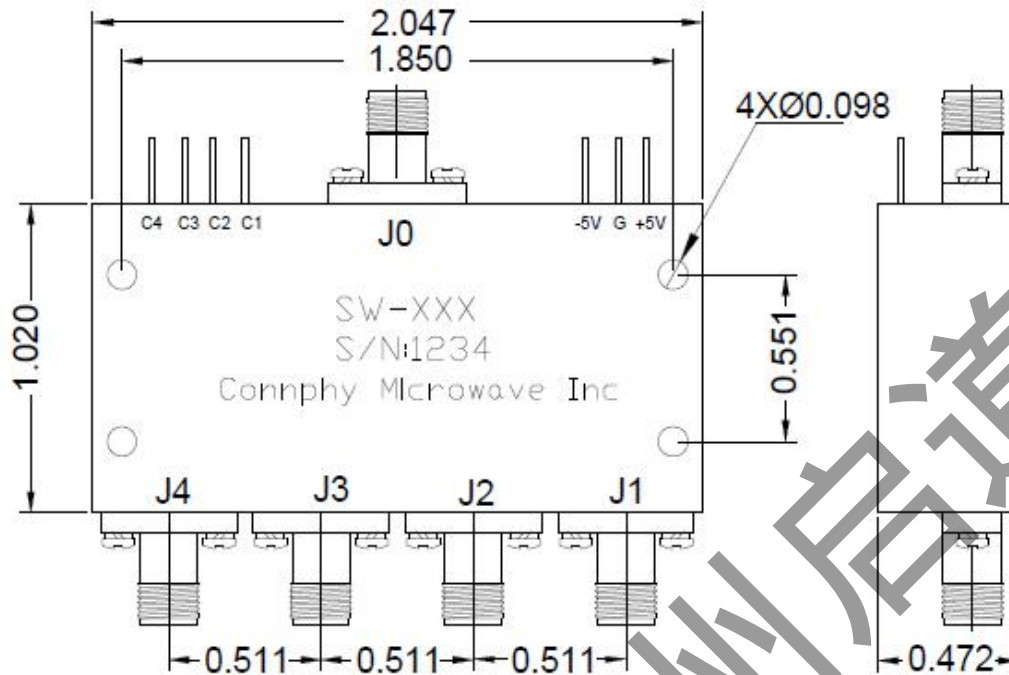

### Specifications:

Frequency:	18 to 26.5GHz
Insertion Loss:	5.0dB max
Isolation:	50dB min
Switching Speed:	200ns max
Power Handling:	23dBm max
VSWR:	2.2:1 max
Voltage/Current:	120mA @ ±5 V typical
Control logic:	TTL
Connectors:	SMA Female
Type:	Absorptive
TTL Truth Table:	Cn=0, Others=1; Path State: J0-Jn

### Environmental Ratings:

Temperature:	-25°C to +71 °C Operating -65 °C to +100 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B

Pin Diode Switch SW-18G26.5G-4A-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@qiidao.com">sales@qiidao.com</a>
CHECKRD:	DATE: 20/05/16	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.