


SW-2G4G-3R-S is a single pole, three throw, reflective switch designed to operate over the 2 to 4 GHz frequency range. This model is designed to handle 27dBm max input power. The switch offers fast switching speeds of 50nsec max., low insertion loss of 1.5 dB and high isolation of 80dB. The DC supplies are 90mA @ ±5 V.

Mechanical Outline(Unit: Inch):

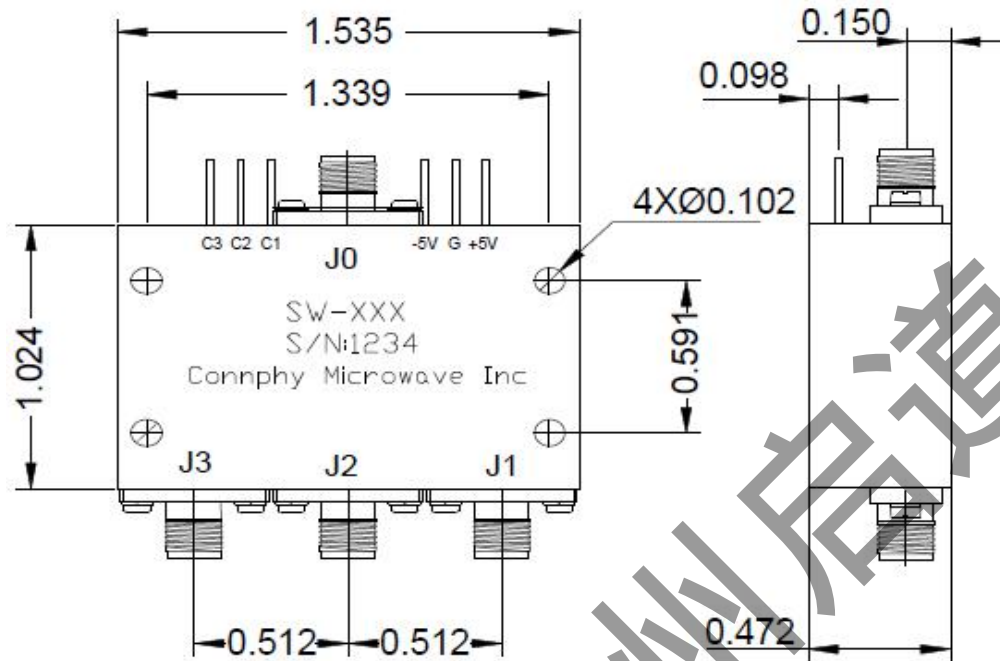

Specifications:

| | |
|------------------|--------------------------------------|
| Frequency: | 2 to 4 GHz |
| Insertion Loss: | 1.5dB max |
| Isolation: | 80dB min |
| Switching Speed: | 50ns max |
| Power Handling: | 27dBm max |
| VSWR: | 1.5:1 max |
| Voltage/Current: | 90mA @ ±5V typical |
| Control logic: | TTL |
| Connectors: | SMA Female |
| Type: | Reflective |
| TTL Truth Table: | Cn=0, Others=1; Path State: J0-Jn |

Environmental Ratings:

| | |
|--------------|--|
| Temperature: | -25°C to +71 °C Operating -65 °C to +100 °C Non-Operating |
| Vibration: | MIL-STD-202F, Method 204D Cond. B |
| Altitude: | MIL-STD-202F, Method 105C Cond. B |

| Pin Diode Switch SW-2G4G-3R-S | | | |
|----------------------------------|-------------------|----------------------|--|
| DRAWN: | DWG NO.: | REV CODE: Rev.1.0 | www.connphy.com sales@qiidao.com |
| CHECKRD: | DATE: 20/05/16 | SHEET : 1 OF 1 | |
| ISSUED: | SIZE: A | SCALE : N / A | Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE. |