


SW-4G8G-3R-S is a single pole, three throw, reflective switch designed to operate over the 4 to 8 GHz frequency range. This model is designed to handle 27dBm max input power. The switch offers fast switching speeds of 50nsec max., low insertion loss of 1.9dB and high isolation of 80dB. The DC supplies are 90mA @ ±5 V.

Mechanical Outline(Unit: Inch):

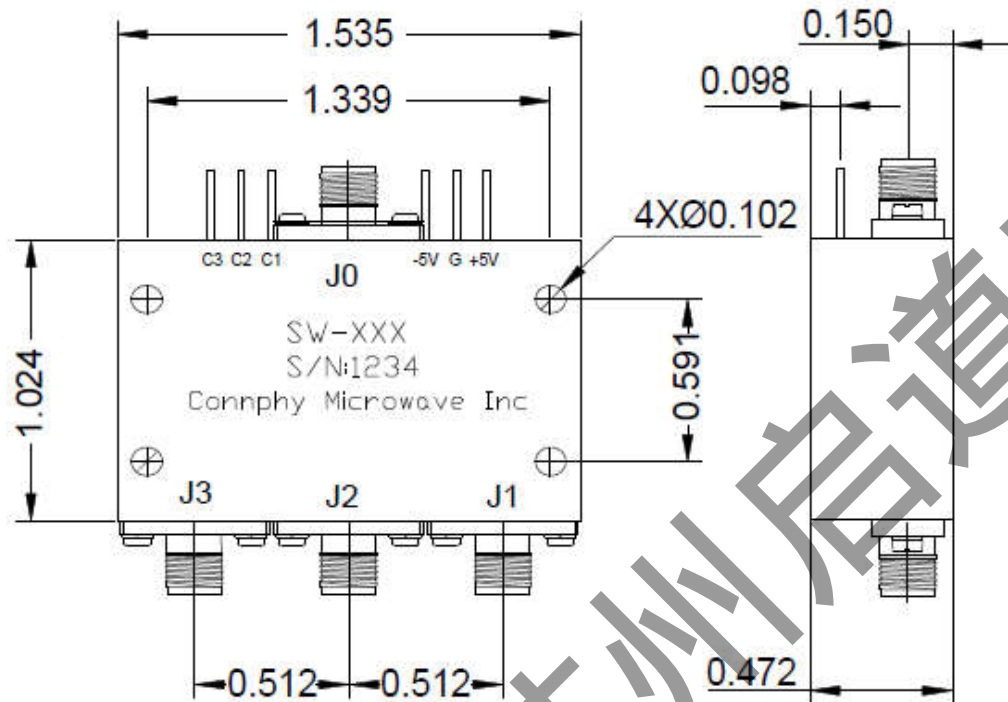

Specifications:

Frequency: 4 to 8 GHz
 Insertion Loss: 1.9dB max
 Isolation: 80dB min
 Switching Speed: 50ns max
 Power Handling: 27dBm max
 VSWR: 1.5:1 max
 Voltage/Current: 90mA @ ±5V typical
 Control logic: TTL
 Connectors: SMA Female
 Type: Reflective
 TTL Truth Table: Cn=0, Others=1;
 Path State: J0-Jn

Environmental Ratings:

Temperature: -25°C to +71 °C Operating
 -65 °C to +100 °C Non-Operating
 Vibration: MIL-STD-202F, Method 204D Cond. B
 Altitude: MIL-STD-202F, Method 105C Cond. B
 Temperature Cycle: MIL-STD-202F, Method 107D Cond. A

Pin Diode Switch			
SW-4G8G-3R-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@qiidao.com
CHECKRD:	DATE: 20/05/16	SHEET : 1 OF 1	
ISSUED:	SIZE:	SCALE : N / A	Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.