



Part	Description	Diameter
1 – Center Conductor	Silver Plated Copper- Stranded	0.027" +/- 0.001
2 – Dielectric	Microporous PTFE Tape	0.078" (nominal)
3 – Outer Conductor	Silver Plated Copper Flat Braid	0.084" (nominal)
4 – Interlayer	Helically Wrap Metalized Film	0.091" (nominal)
5 – Shield	Silver Plated Copper Round Braid	0.107" (nominal)
6 – Jacket	Extruded FEP	0.124" +/- 0.005
	Extruded Polyurethane	0.155" +/- 0.008

VSWR	1.20 : 1
Impedance	50 +/- 2 ohms
Velocity of Propagation	74% Nominal
Delay	1.35 ns/ft
Capacitance	27 pF
Maximum Frequency	50Ghz

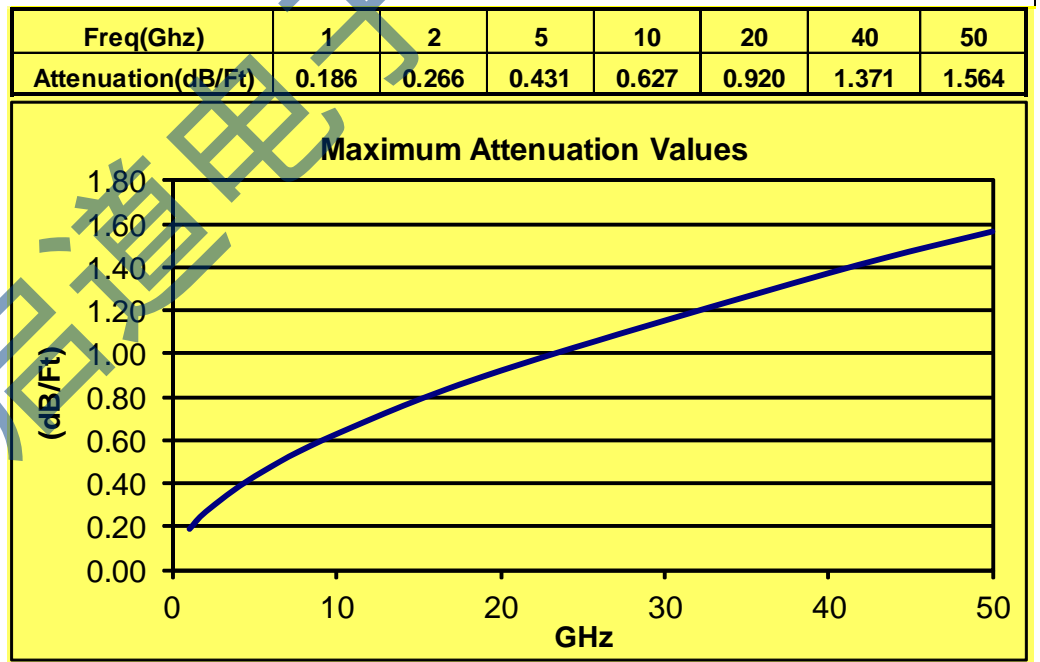

CABLE OVERVIEW

苏州启道 — 中国区优势专业供应商
sales@qiidao.com

 cinch CONNECTIVITY SOLUTIONS a bel group	PRODUCT LINE		SEMFLEX		
	DESCRIPTION				HP120 WORK INSTRUCTIONS
DATE	2/17/2012		SIZE	RoHS	DOCUMENT
DRAWN BY	J. Vidallon		A	COMPLIANT	WI-88104
REVISED	8/31/2018		Form#	1327 Rev 1	SHEET 1 OF 13