



Part	Description	Diameter
1 – Center Conductor	Silver Plated Copper- Solid	0.025" +/- 0.001
2 – Dielectric	Microporous PTFE Tape	0.074" (nominal)
3 – Outer Conductor	Silver Plated Copper Flat Braid	0.080" (nominal)
4 – Interlayer	Helically Wrap Metalized Film	0.088" (nominal)
5 – Shield	Silver Plated Copper Round Braid	0.104" (nominal)
6 – Jacket	Extruded FEP	0.124" +/- 0.005
	Extruded Polyurethane	0.134" +/- 0.008

VSWR	1.20 : 1
Impedance	50 +/- 2 ohms
Velocity of Propagation	74% Nominal
Delay	1.34 ns/ft
Capacitance	26.7 pF
Maximum Frequency	50Ghz

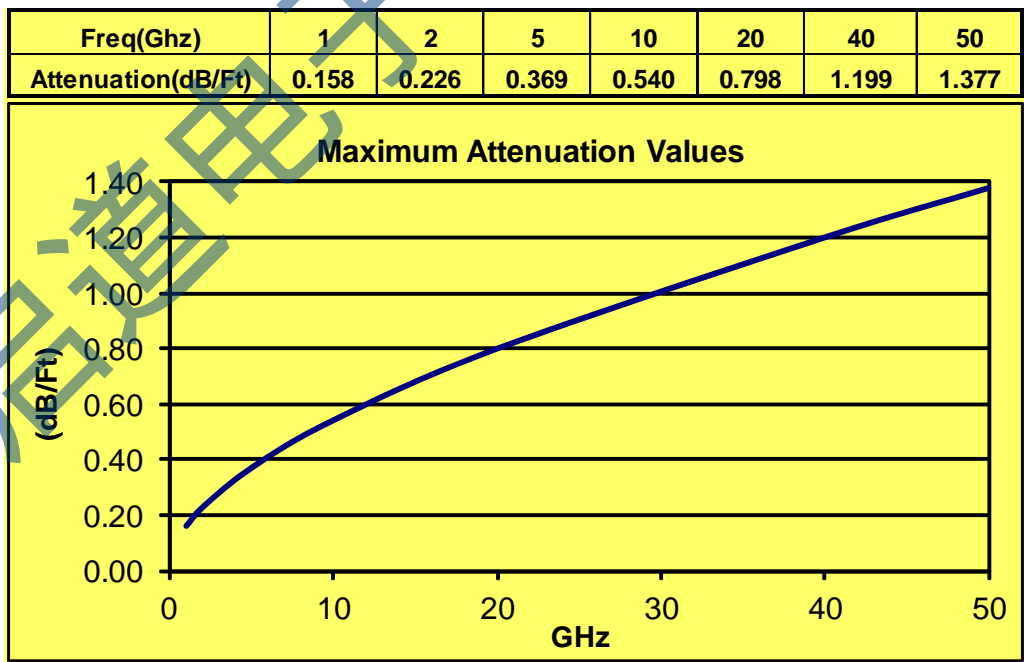

苏州启道 — 中国区优势专业供应商
sales@qiidao.com

CABLE OVERVIEW

	PRODUCT LINE		SEMFLEX	
	DESCRIPTION		HP120S WORK INSTRUCTIONS	
DATE	2/17/2012		SIZE	A
DRAWN BY	J. Vidallon		RoHS	COMPLIANT
REVISD	3/15/2016		DOCUMENT	WI-88142
Form# 1327 Rev: 1			SHEET 1 OF 19	