



Part	Description	Diameter
1 – Center Conductor	Silver Plated Copper- Stranded	0.129" +/- 0.001
2 – Dielectric	Microporous PTFE Tape	0.357"(nominal)
3 – Outer Conductor	Silver Plated Copper Flat Braid	0.369" (nominal)
4 – Interlayer	Helically Wrap Metalized Film	0.378"(nominal)
5 – Shield	Silver Plated Copper Round Braid	0.403" (nominal)
6 – Jacket	Extruded FEP	0.450" +/- 0.010
	Extruded Polyurethane	0.520" +/- 0.010

VSWR	1.20 : 1
Impedance	50 +/- 2 ohms
Velocity of Propagation	78% Nominal
Delay	1.35 ns/ft
Capacitance	27 pF
Maximum Frequency	12Ghz

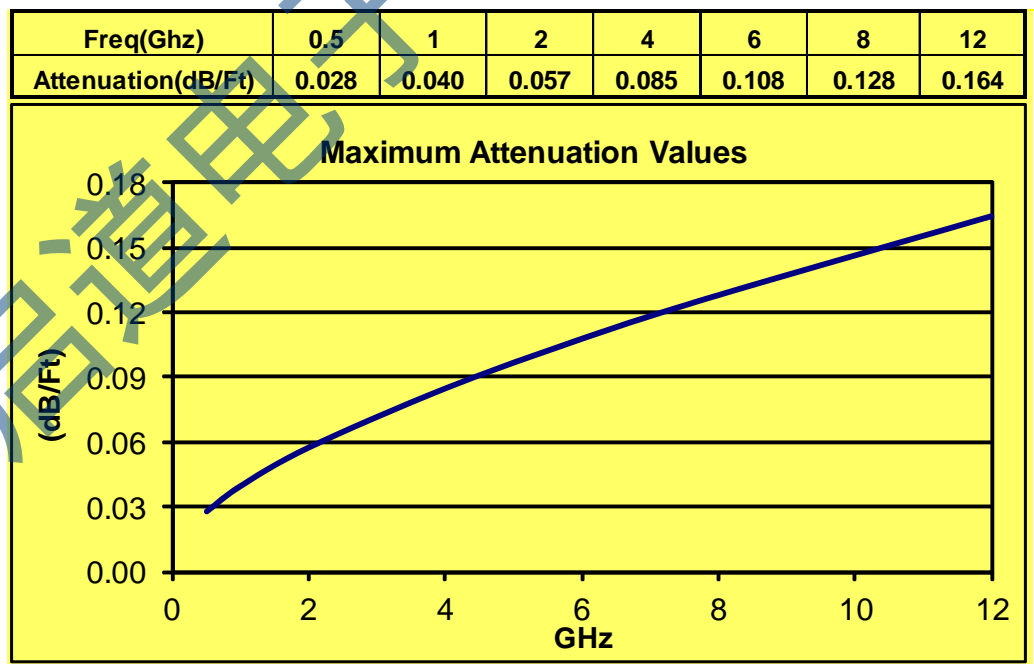

CABLE OVERVIEW

苏州启道 — 中国区优势专业供应商
sales@qiidao.com

	PRODUCT LINE		SEMFLEX	
	DESCRIPTION			
HP450 WORK INSTRUCTIONS				
DATE	2/17/2012	SIZE	A	DOCUMENT
DRAWN BY	J. Vidallon	RoHS	COMPLIANT	WI-88123
REVISED	8/31/2018	Form#	1327 Rev 1	SHEET 1 OF 14