



Part	Description	Diameter
1 – Center Conductor	Copper Clad Aluminum - Solid	0.114 +/- 0.001
2 – Dielectric	Microporous PTFE Tape	0.315" (nominal)
3 – Outer Conductor	Silver Plated Copper Flat Braid	0.327" (nominal)
4 – Shield	Silver Plated Copper Round Braid	0.352" (nominal)
5 – Jacket	Extruded FEP	0.415" +/- .010
	Extruded Polyurethane	0.440" +/- .010

<b>VSWR</b>	<b>1.20 : 1</b>
<b>Impedance</b>	<b>50 +/- 2 ohms</b>
<b>Velocity of Propagation</b>	<b>82% Nominal</b>
<b>Delay</b>	<b>1.25 ns/ft</b>
<b>Capacitance</b>	<b>24 pF</b>
<b>Maximum Frequency</b>	<b>14Ghz</b>

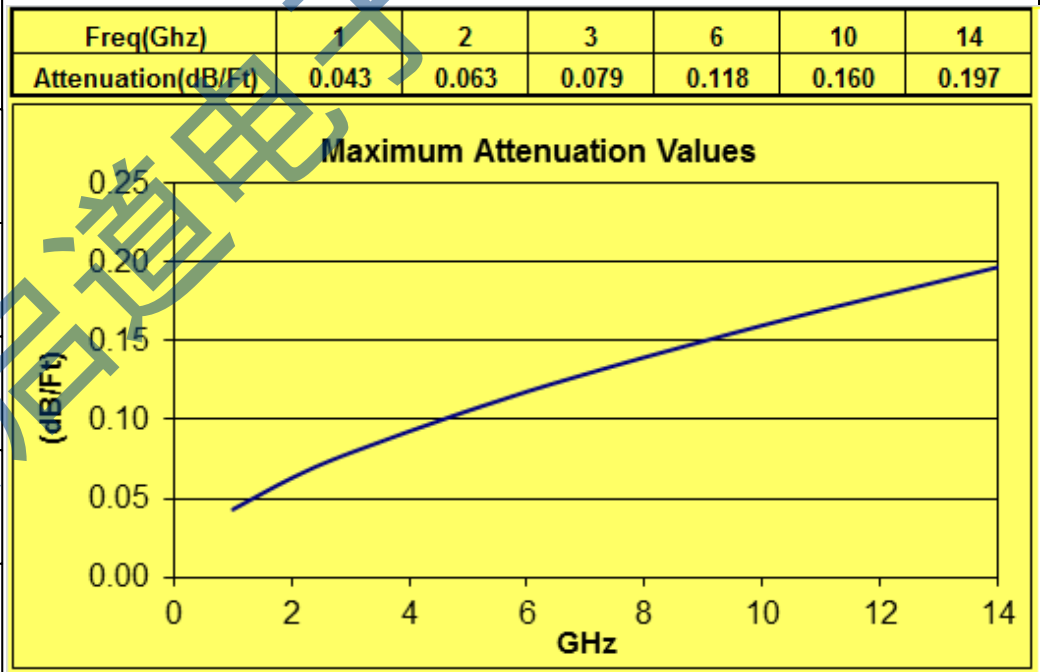

苏州启道 — 中国区优势专业供应商  
sales@qiidao.com

**CABLE OVERVIEW**

	PRODUCT LINE		SEMFLEX	
	DESCRIPTION		KW430 WORK INSTRUCTIONS	
DATE	4/17/2012		SIZE	A
DRAWN BY	J. Vidallon		RoHS	COMPLIANT
REVISD	12/3/2020		DOCUMENT	WI-88238
Form# 1327 Rev. 1			SHEET 1 OF 9	