



Part	Description	Diameter
1 – Center Conductor	Silver Plated Copper- Solid	0.055" +/- 0.001
2 – Dielectric	Extruded PTFE Core	0.147" (nominal)
3 – Outer Conductor	Helically Wrap Silver Plated Copper Flat Braid	0.158" (nominal)
4 – Shield	Silver Plated Round Braid	0.174" (nominal)
5 – Jacket	Extruded FEP	0.189" +/- 0.005
	Extruded ETFE	0.189" +/- 0.005

VSWR	1.20 : 1
Impedance	50 +/- 2 ohms
Velocity of Propagation	84% Nominal
Delay	1.20 ns/ft
Capacitance	23.8 pF/ft
Maximum Frequency	28Ghz

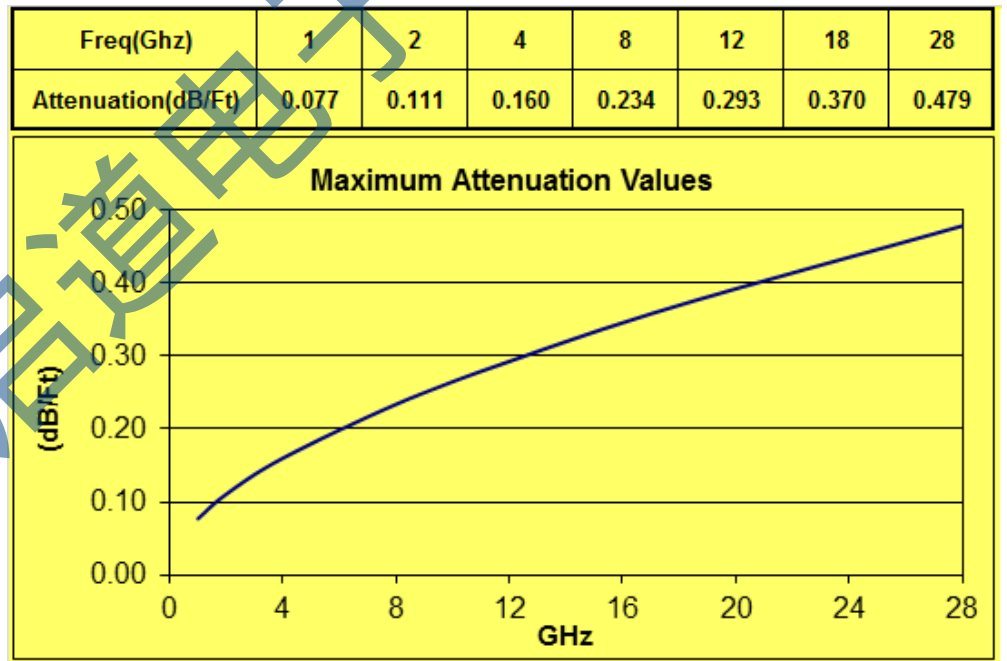

苏州启道 — 中国区优势专业供应商  
sales@qiidao.com

CABLE OVERVIEW			
		PRODUCT LINE <b>SEMFLEX</b>	
		DESCRIPTION <b>LA190S WORK INSTRUCTIONS</b>	
DATE 4/3/2014		DOCUMENT WI-88315	
DRAWN BY J. Vidallon		SIZE A	RoHS <b>COMPLIANT</b>
REVISED 11/30/2016		Form# 1327 Rev: 1	SHEET 1 OF 9