


Part	Description	Diameter
1 – Center Conductor	Silver Plated Copper- Solid	0.089" +/- 0.001
2 – Dielectric	Microporous PTFE Tape	0.241" (nominal)
3 – Outer Conductor	Helically Wrap Silver Plated Copper Flat Braid	0.253" (nominal)
4 – Shield	Silver Plated Copper Round Braid	0.269" (nominal)
5 – Jacket	Extruded FEP	0.292" +/- 0.008
	Extruded Polyurethane	0.310" +/- 0.010


VSWR	1.20 : 1
Impedance	50 +/- 2 ohms
Velocity of Propagation	83% Nominal
Delay	1.21 ns/ft
Capacitance	24.3 pF
Maximum Frequency	18Ghz

Freq(GHz)	0.45	1	3	6	12	18
Attenuation(dB/Ft)	0.0293	0.0443	0.079	0.1150	0.1691	0.2132

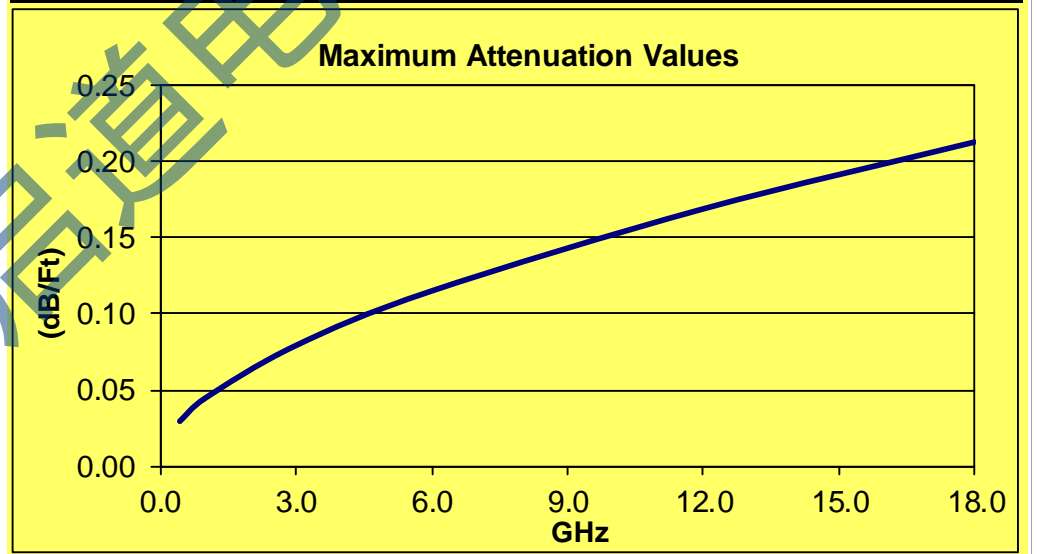

苏州启道 — 中国区优势专业供应商
sales@qidao.com

CABLE OVERVIEW

 cinch <small>CONNECTIVITY SOLUTIONS</small> <small>a bel group</small>	PRODUCT LINE		SEMFLEX	
	DESCRIPTION			
DATE	2/16/2012		SIZE	A
DRAWN BY	J. Vidallon		RoHS	COMPLIANT
REVISED	1/12/2017		DOCUMENT	WI-88242
			Form#	1327 Rev: 1
			SHEET	1 OF 19