


Part	Description	Diameter
1 – Center Conductor	Solid Silver Plated Copper Clad Steel	0.036" +/- 0.001
2 – Dielectric	Solid PTFE Core	0.116" (nominal)
3 – Outer Conductor	Helically Wrap Silver Plated Copper Flat Braid	0.124" (nominal)
4 – Shield	Silver Plated Copper Round Braid	0.141" (nominal)
5 – Jacket	Extruded FEP	0.161" +/- 0.005
	Extruded Polyurethane	NA


VSWR	1.20 : 1
Impedance	50 +/- 2 ohms
Velocity of Propagation	70% Nominal
Delay	1.45 ns/ft
Capacitance	29.4 pF
Maximum Frequency	18Ghz

Freq(GHz)	0.50	1	2	6	12	18
Attenuation(dB/Ft)	0.079	0.116	0.171	0.328	0.507	0.662

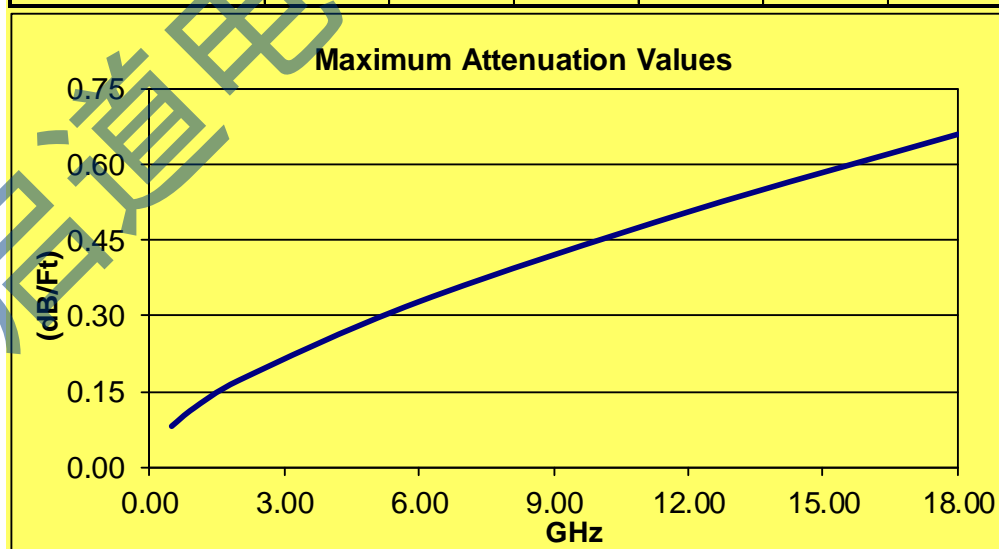

苏州启道 — 中国区优势专业供应商
sales@qiidao.com

CABLE OVERVIEW

	PRODUCT LINE		SEMFLEX	
	DESCRIPTION			
DATE		2/13/2012		
DRAWN BY		J. Vidallon		
REVISED		12/14/2016		
SIZE	RoHS	DOCUMENT		
A	COMPLIANT	WI-88256		
Form#	1327 Rev: 1	SHEET		1 OF 9