



Part	Description	Diameter
1 – Center Conductor	Silver Plated Copper- Solid	0.025" +/- 0.001
2 – Dielectric	PTFE Tape	0.074" (nominal)
3 – Outer Conductor	Silver Plated Copper Flat Braid	0.080" (nominal)
4 – Shield	Silver Plated Copper Round Braid	0.096" (nominal)
5 – Jacket	Extruded FEP	0.118+/-0.003"
	Extruded Polyurethane	NA

VSWR	1.20 : 1
Impedance	50 +/- 2 ohms
Velocity of Propagation	75% Nominal
Delay	1.34 ns/ft
Capacitance	26.7 pF
Maximum Frequency	18Ghz

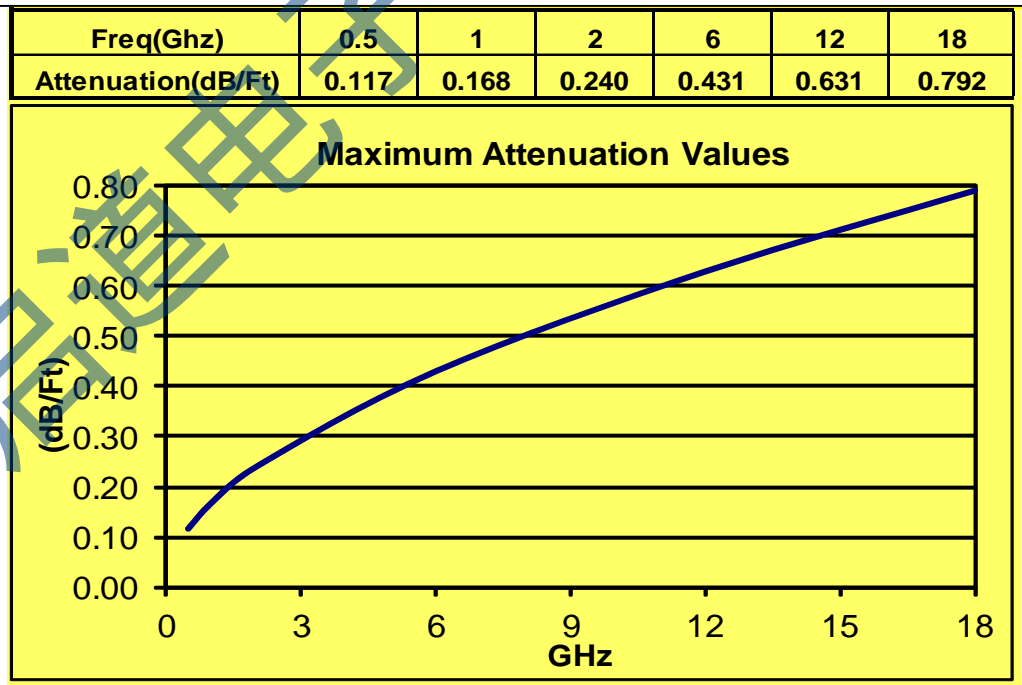

CABLE OVERVIEW

苏州启道 — 中国区优势专业供应商
sales@qidao.com

 cinch CONNECTIVITY SOLUTIONS a bel group	PRODUCT LINE		SEMFLEX			
	DESCRIPTION				SW110S WORK INSTRUCTIONS	
DATE	2/17/2012		SIZE	A	RoHS	COMPLIANT
DRAWN BY	J. Vidallon		DOCUMENT	WI-SW110		
REVISED	4/25/2016		Form#	1327 Rev: 1	SHEET	1 OF 10