


Part	Description	Diameter
1 – Center Conductor	Silver Plated Copper- Solid	0.036" +/- 0.001
2 – Dielectric	Microporous PTFE Tape	0.108" (nominal)
3 – Outer Conductor	Silver Plated Copper Flat Braid	0.120" (nominal)
4 – Shield	Silver Plated Copper Round Braid	0.136" (nominal)
5 – Jacket	Extruded FEP	0.153" +/- .008
	Extruded Polyurethane	0.170" +/- .010


VSWR	1.20 : 1
Impedance	50 +/- 2 ohms
Velocity of Propagation	75% Nominal
Delay	1.34 ns/ft
Capacitance	26.9 pF
Maximum Frequency	18Ghz

Freq(GHz)	0.50	1	2	6	12	18
Attenuation(dB/Ft)	0.0897	0.1279	0.1829	0.3256	0.4724	0.5903

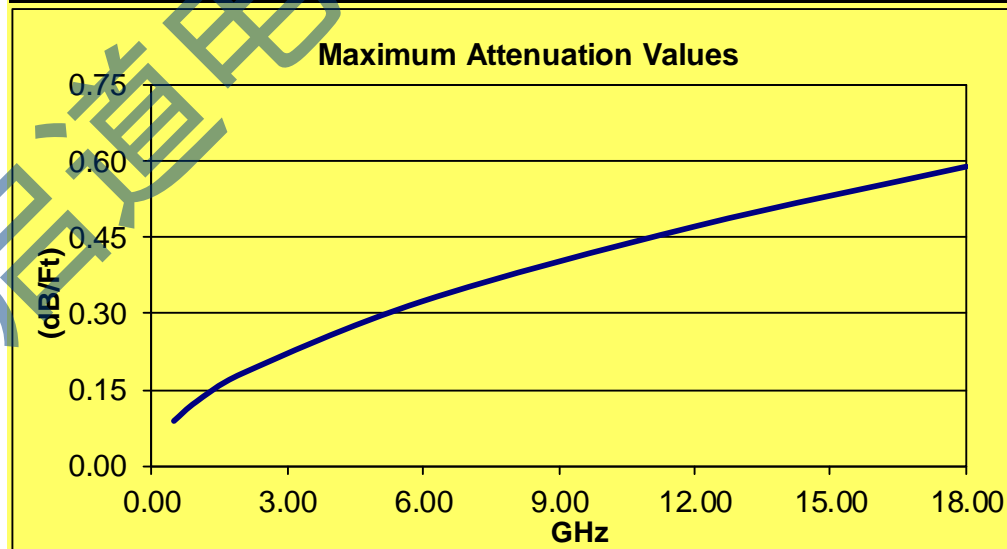

苏州启道 — 中国区优势专业供应商
sales@qiidao.com

CABLE OVERVIEW

	PRODUCT LINE		SEMFLEX	
	DESCRIPTION			SW150 WORK INSTRUCTIONS
	DATE	DRAWN BY		DOCUMENT
4/17/2012	J. Vidallon		WI-SW150	
REVISD	SIZE	RoHS	DOCUMENT	
4/1/2016	A	COMPLIANT	WI-SW150	
Form#	1327 Rev: 1	SHEET	1 OF 9	