



Part	Description	Diameter
1 – Center Conductor	Silver Plated Copper- Solid	0.051" +/- 0.001
2 – Dielectric	Microporous PTFE Tape	0.151" (nominal)
3 – Outer Conductor	Silver Plated Copper Flat Braid	0.163" (nominal)
4 – Shield	Silver Plated Copper Round Braid	0.180" (nominal)
5 – Jacket	Extruded FEP	0.196" +/- .008
	Extruded Polyurethane	0.227" +/- .008

<b>VSWR</b>	<b>1.20 : 1</b>
<b>Impedance</b>	<b>50 +/- 2 ohms</b>
<b>Velocity of Propagation</b>	<b>76.5% Nominal</b>
<b>Delay</b>	<b>1.35 ns/ft</b>
<b>Capacitance</b>	<b>27 pF</b>
<b>Maximum Frequency</b>	<b>18Ghz</b>

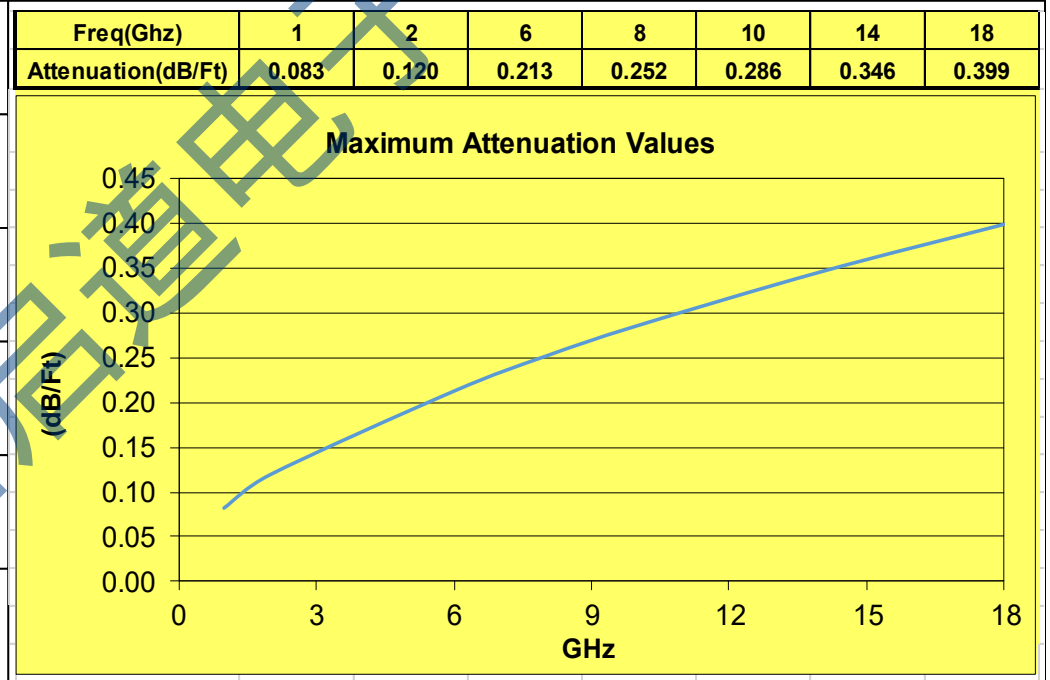

**CABLE OVERVIEW**

苏州启道 — 中国区优势专业供应商  
sales@qiidao.com

 cinch CONNECTIVITY SOLUTIONS a bel group	PRODUCT LINE		SEMFLEX	
	DESCRIPTION			
DATE		2/17/2012		
DRAWN BY		J. Vidallon		
REVISED		12/3/2020		
SIZE	RoHS	DOCUMENT		
A	COMPLIANT	WI-SW180		
Form#	1327 Rev. 1	SHEET		1 OF 10