


SW-26.5G40G-4R-K is a single pole, four throw, reflective switch designed to operate over the 26.5 to 40GHz frequency range. This model is designed to handle 27dBm max input power. The switch offers fast switching speeds of 200nsec max., low insertion loss of 4.5dB and high isolation of 50dB. The DC supplies are 120mA @ ±5 V.

Mechanical Outline(Unit: Inch):

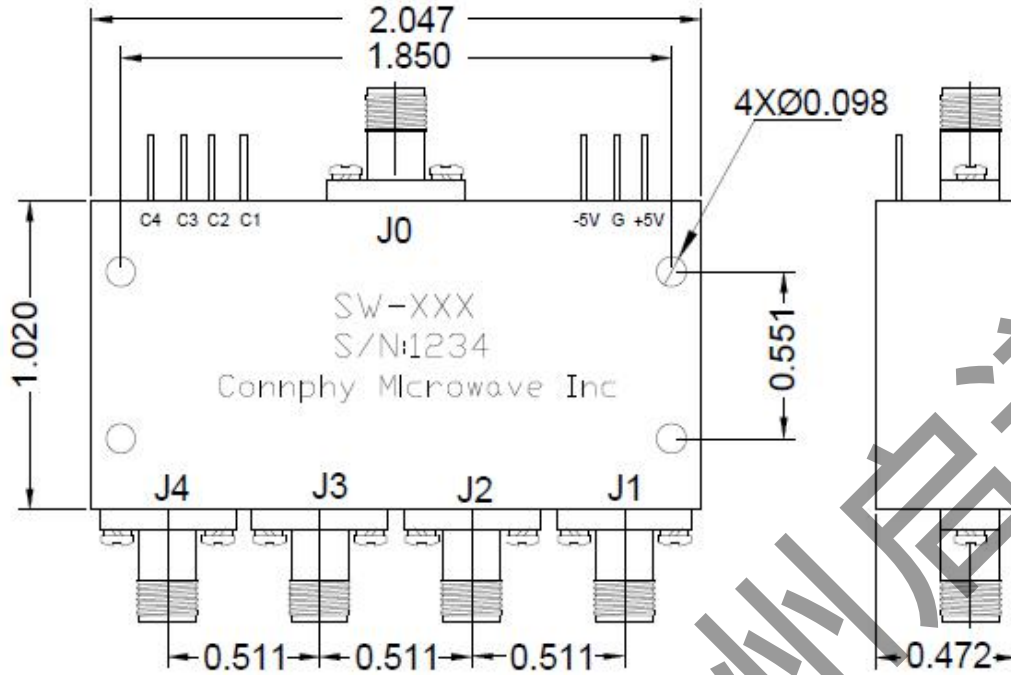

Specifications:

Frequency:	26.5 to 40GHz
Insertion Loss:	4.5dB max
Isolation:	50dB min
Switching Speed:	200ns max
Power Handling:	27dBm max
VSWR:	2.2:1 max
Voltage/Current:	120mA @ ±5 V typical
Control logic:	TTL
Connectors:	2.92 Female
Type:	Reflective
TTL Truth Table:	Cn=0, Others=1; Path State: J0-Jn

Environmental Ratings:

Temperature:	-25°C to +71 °C Operating -65 °C to +100 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B

Pin Diode Switch SW-26.5G40G-4R-K

DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@qiidao.com
CHECKRD:	DATE: 20/05/16	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.