


Part	Description	Diameter
1 - Center Conductor	Silver Plated Copper Clad Steel-Stranded	0.0201" +/- 0.001
2 - Dielectric	Solid PTFE Core	0.060" (nominal)
3 - Outer Conductor	Helically Wrap Silver Plated Copper Flat Braid	0.066" (nominal)
4 - Shield	Silver Plated Copper Round Braid	0.083" (nominal)
5 - Jacket	Extruded FEP	0.100" +/- 0.005
	Extruded Polyurethane	NA


VSWR	1.20 : 1
Impedance	50 +/- 2 ohms
Velocity of Propagation	70% Nominal
Delay	1.45 ns/ft
Capacitance	29.4 pF
Maximum Frequency	18Ghz

Freq(GHz)	0.5	1	2	3	6	12	18
Attenuation(dB/Ft)	0.176	0.252	0.363	0.447	0.659	0.975	1.233

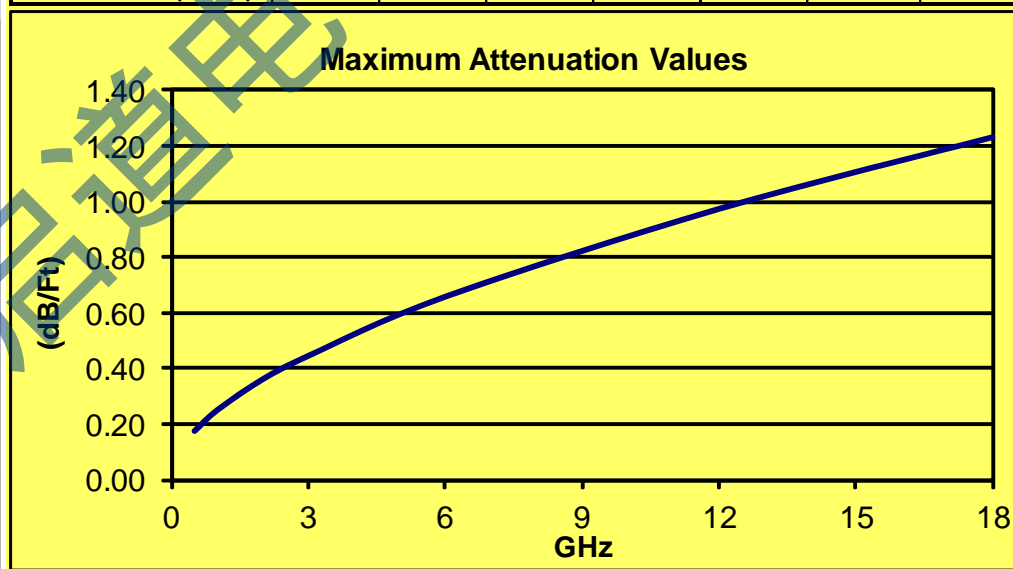

苏州启道 — 中国区优势专业供应商
sales@qiidao.com

CABLE OVERVIEW

	PRODUCT LINE		SEMFLEX
	DESCRIPTION		
DATE	2/13/2012		
DRAWN BY	J. Vidallon		
REVISED	4/1/2016		
SIZE	A	RoHS	COMPLIANT
DOCUMENT	WI-88257		
Form#	1327 Rev: 1	SHEET	1 OF 8